



DECOSCAPE
LIGHTING

PERFECT INTEGRATION OF LIGHTS AND SPACE

DECOSCAPE

LIGHTING

Decoscape Lighting is an architectural lighting brand part of the Luceco portfolio a global leader in design, manufacture and supply of lighting systems for the specification sector. From off the shelf products to tailored solutions, Luceco provides a comprehensive product portfolio with full lighting design and technical support.

Luceco continually invests in environmentally friendly responsible technology and innovation, its brands offer a leading portfolio of thoughtfully designed and digitally made products. From task and emergency to ambient architectural, employing the latest in energy-saving and sustainable technology.

Major sectors served residential, commercial, office, Healthcare, education, retail, industrial, public sector, Street and highway.

Our portfolio of respected lighting brands, include:

DECOSCAPE
LIGHTING



PULSAR



"Operating sustainably is a key part of the Group's culture and is reflected within our Purpose, Mission and Strategy; where we have made sustainability a central pillar of the Group's success"

John Hornby
Chief Executive Officer





MODULAR CIRCULAR/LINEAR SPOTLIGHT



pg. 11-12



pg. 15



pg. 16



pg. 17

SURFACE DOWNLIGHT



pg. 20-21




pg. 21

60x60 PANEL




pg. 22



pg. 23-24

LINEAR SYSTEM



pg. 25-26

STRIPLIGHT



IP20

pg. 29-30



IP65

pg. 31-32



IP67

pg. 33-34



NEON

pg. 35-36

DOWNLIGHT



pg. 37-38



pg. 38-39



pg. 40-41



pg. 41-42



pg. 43



pg. 43

MIRROR LIGHT



pg. 44-45

BULKHEAD



pg. 46-47



pg. 48-49



pg. 50



pg. 51-53



pg. 54-56



pg. 57



pg. 58



pg. 59-60

WEATHERPROOF



pg. 61



pg. 62

HIGHBAY



pg. 63



pg. 64



pg. 65-66

FLOODLIGHT



pg. 66-67

PROJECTOR



pg. 68

UPLIGHT



pg. 69-70

POST-TOP



pg. 71



pg. 73



pg. 73



pg. 74

STREET LIGHT



pg. 78



pg. 86-91

SOLAR STREET LIGHT



pg. 92-95

BOLLARD



pg. 71



pg. 72



pg. 75



pg. 76



pg. 76



pg. 77



pg. 77

EXPLOSION PROOF

WEATHERPROOF



pg. 96-98

LINEAR



pg. 99-101

HIGHBAY



pg. 102-105



pg. 106-111

FLOODLIGHT



pg. 112-117

BULKHEAD



pg. 118-119




Modular Circular SpotLight

- Adopt imported COB LED, high CRI, high efficiency, high illumination.
- Self-designed reflector with special optic, precise light distribution and high lumen output, no-glare, soft and tender light.
- Environmental, no UV, nice heat dissipation.
- Easy to install and to adjust.
- Life span up to 50,000 hours
- Various power options for different requirements.
- Applied to shopping mall, hotel, exhibition hall, museum and etc.

Modular Circular Spotlight

- High performance, a variety of cover/size/power options
- Can be matched with different optical accessories to meet various lighting needs
- CRI>90, UGR<15, high light extraction rate, good heat dissipation
- Cut out size: Ø55mm / Ø75mm / Ø90mm / Ø100mm / Ø125mm / Ø150mm
- Power: 6W / 9W / 12W / 15W / 24W / 28W / 32W / 41W

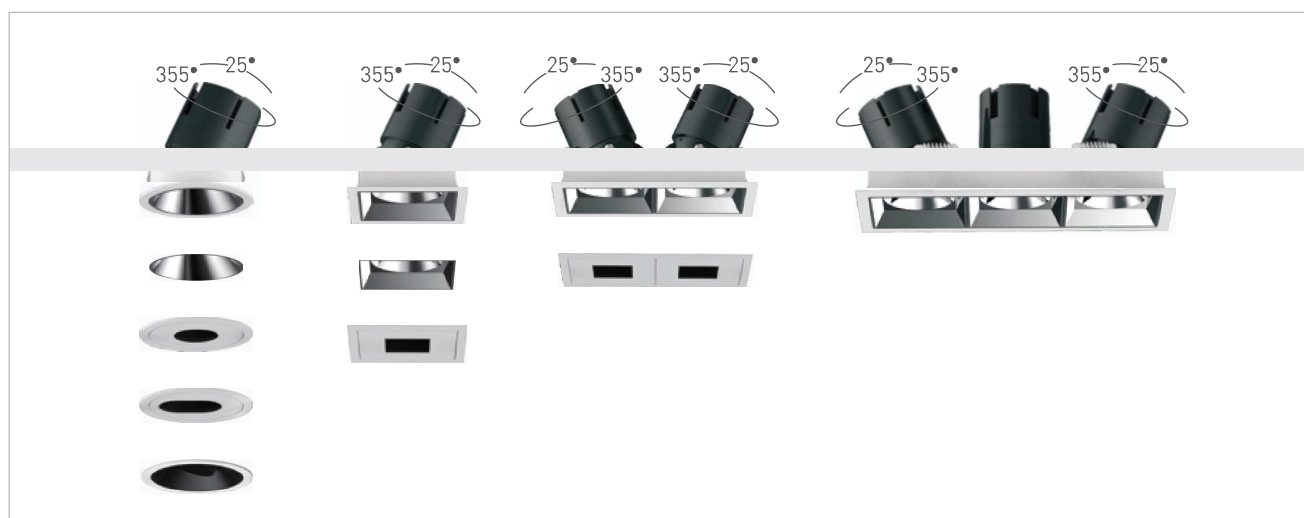

REFLECTOR COLOUR – ROTATABLE



REFLECTOR COLOUR – FIXED



REFLECTOR COLOUR – SQUARE




REFLECTOR COLOUR – SQUARE




Modular Circular Spotlight


DETAILS

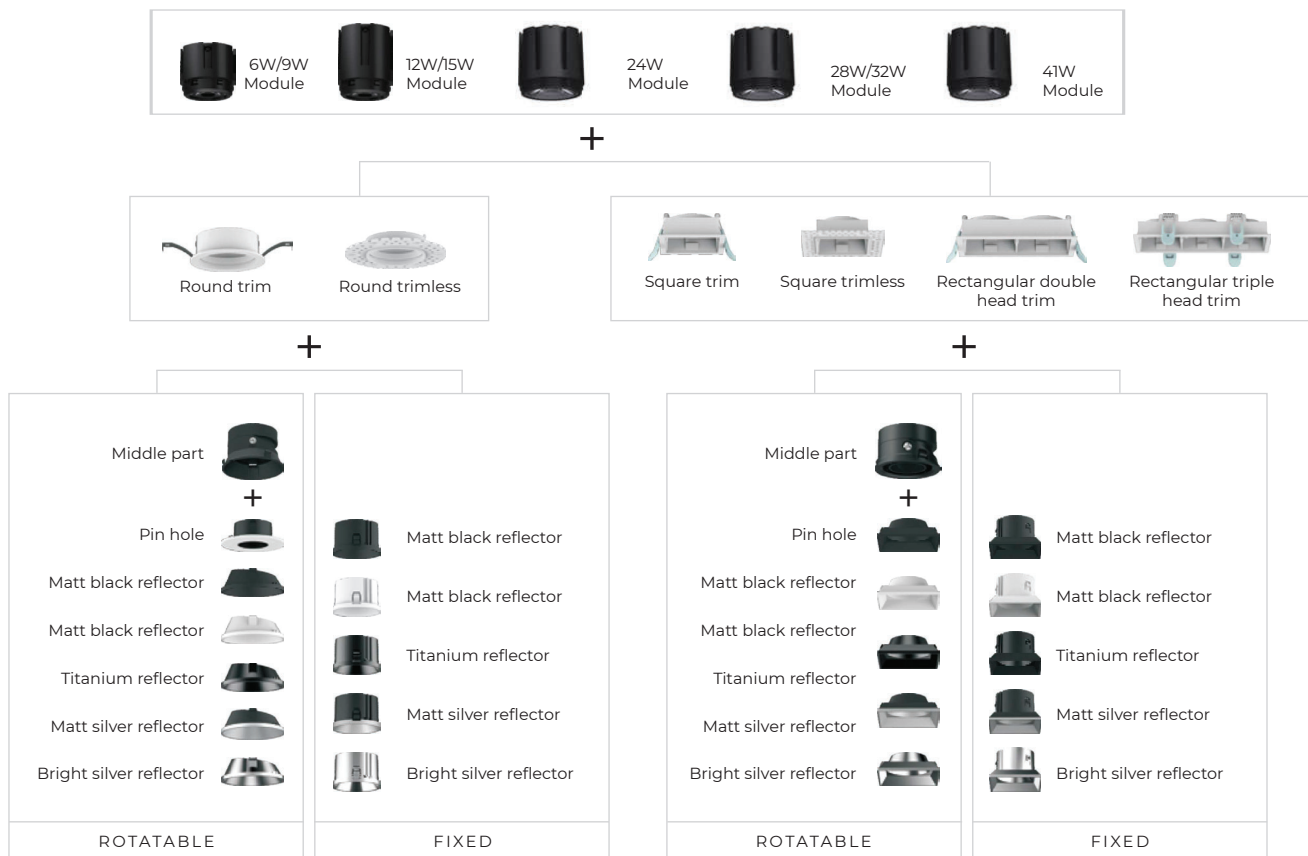


ACCESSORIES

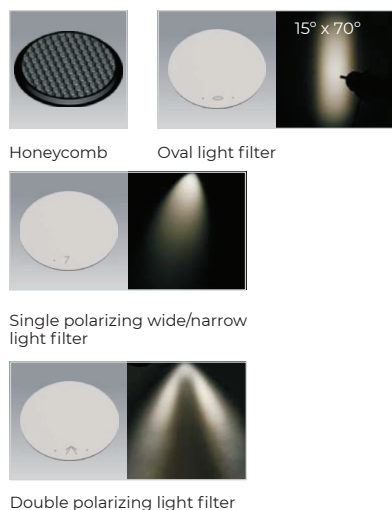

OPTIONAL MODULE

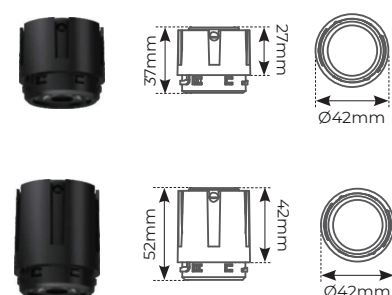

HOUSING KIT

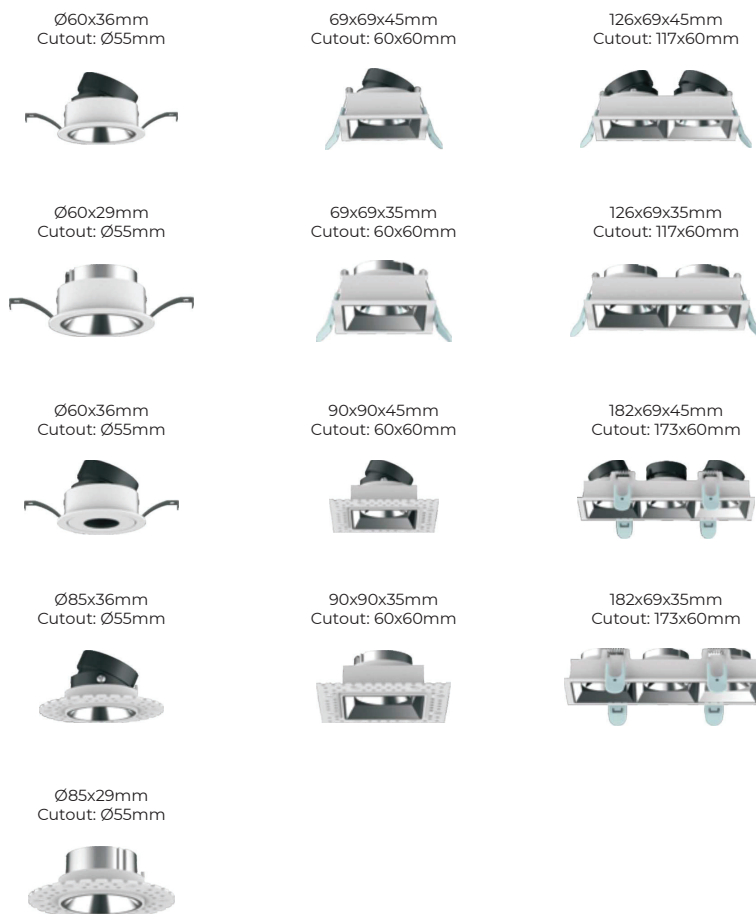



Modular Linear SpotLight

- Adopt imported COB LED, high CRI, high efficiency, high illumination.
- Self-designed reflector with special optic, precise light distribution and high lumen output, no-glare, soft and tender light.
- Environmental, no UV, nice heat dissipation.
- Easy to install and to adjust.
- Life span up to 50,000 hours
- Various power options for different requirments.
- Applied to shopping mall, hotel, exhibition hall, museum and etc.

Modular Linear Spotlight




3 LED 5W



6 LED 10W



2 x 6 LED 2 x 10W

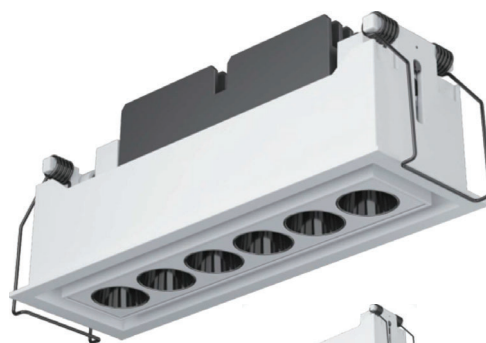

Detachable light source module

LIGHT EFFECT



General lighting





Accent Lighting



Wall washing Lighting

BEAM ANGLE




5W	10W	2 x 10W



Optional Module




Surface Colour Options: **Black**

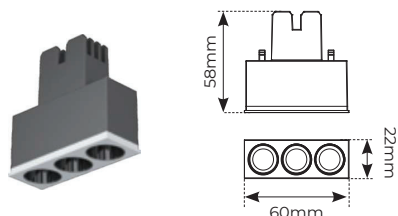

WATTAGE	5W (±10%)
LED CURRENT	DC 500mA
FLUX	300lm
CCT	3000K
CRI	>90

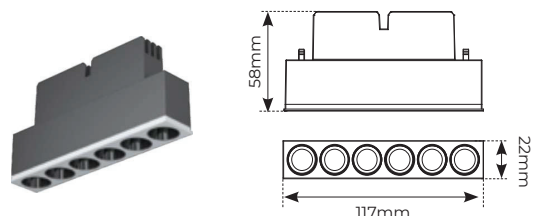


WATTAGE	10W (±10%)
LED CURRENT	DC 500mA
FLUX	700lm
CCT	3000K
CRI	>90




Surface Colour Options: **Black / White**




WATTAGE	5W (±10%)
LED CURRENT	DC 500mA
FLUX	300lm
CCT	3000K
CRI	>90




PRODUCT DRAWING




PRODUCT DRAWING




PRODUCT DRAWING



PRODUCT DRAWING




Modular Linear Spotlight

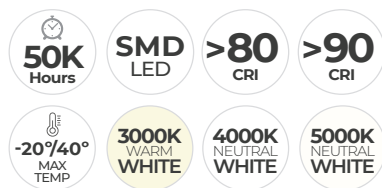


Surface Colour Options: **White & Black**


WATTAGE	10W (±10%)
LED CURRENT	DC 500mA
FLUX	700lm
CCT	3000K
CRI	>90




PRODUCT DRAWING

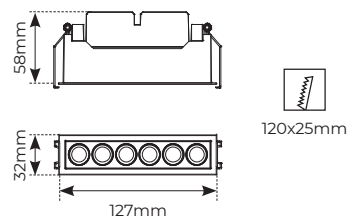


PRODUCT DRAWING




PRODUCT DRAWING

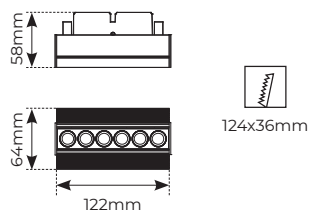


PRODUCT DRAWING



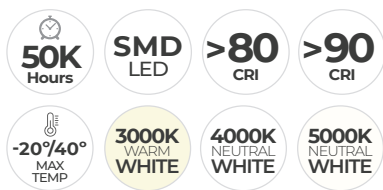


Surface Colour Options: **White & Black**


WATTAGE	20W (±10%)
LED CURRENT	DC 500mA
FLUX	1350lm
CCT	3000K
CRI	>90




PRODUCT DRAWING

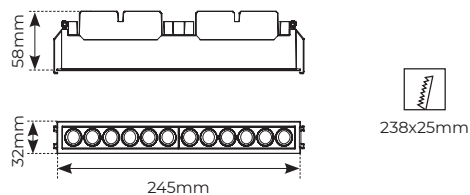


PRODUCT DRAWING

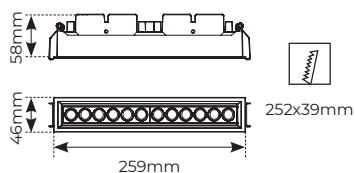

PRODUCT DRAWING

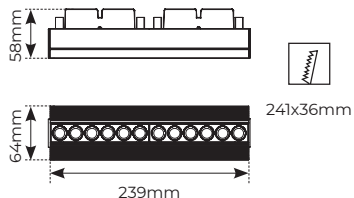

PRODUCT DRAWING

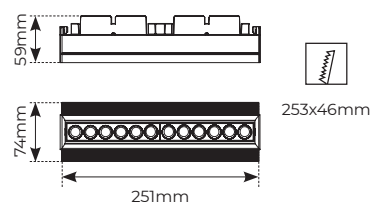




Surface Mounted Downlight


- Adopt imported LED, high CRI, high efficiency, high illumination.
- Self-designed reflector with special optic, precise light distribution and high lumen output, no-glare, soft and tender light.
- Environmental, no UV, nice heat dissipation.
- Easy to install and to adjust.
- Life span up to 50,000 hours.
- Various power options for different requirements.
- Applied to shopping mall, hotel, exhibition hall, museum and etc.

Surface Mounted DOWNLIGHT


PRODUCT DRAWING

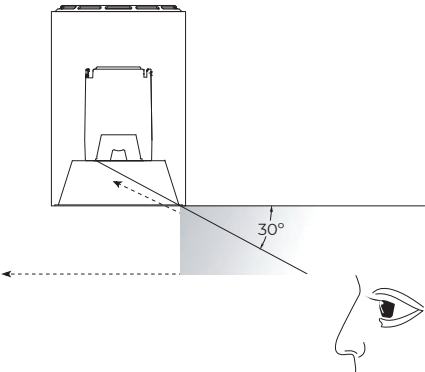

CEILING MOUNTED


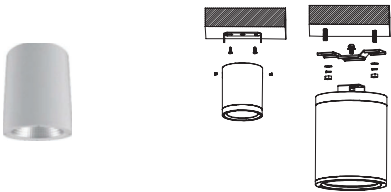


SCREW POLE PENDANT MODE

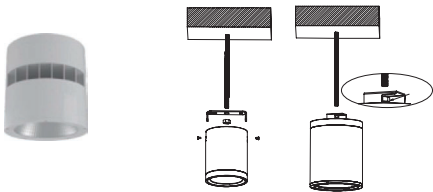




PRODUCT DRAWING

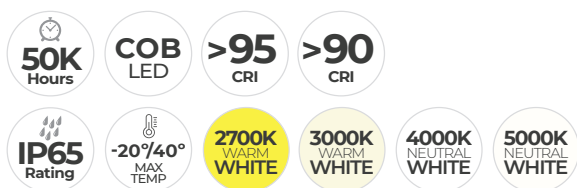


Surface Colour Options: **White**


WATTAGE	9W (±10%)
LED CURRENT	DC 200mA
FLUX	800lm
CCT	3000K
CRI	>90




WATTAGE	12W (±10%)
LED CURRENT	DC 300mA
FLUX	1100lm
CCT	3000K
CRI	>90




WATTAGE	15W (±10%)
LED CURRENT	DC 350mA
FLUX	1350lm
CCT	3000K
CRI	>90




PRODUCT DRAWING

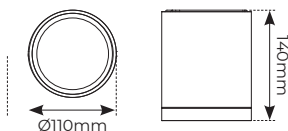

WATTAGE	15W (±10%)
LED CURRENT	DC 350mA
FLUX	1400lm
CCT	3000K
CRI	>90




WATTAGE	24W (±10%)
LED CURRENT	DC 600mA
FLUX	2300lm
CCT	3000K
CRI	>90



WATTAGE	15W (±10%)
LED CURRENT	DC 350mA
FLUX	1350lm
CCT	3000K
CRI	>90



PRODUCT DRAWING



Accessories




Protection Net




Reflector

WATTAGE	28W (±10%)
LED CURRENT	DC 700mA
FLUX	2500lm
CCT	3000K
CRI	>90





WATTAGE	32W (±10%)
LED CURRENT	DC 800mA
FLUX	2900lm
CCT	3000K
CRI	>90






PRODUCT DRAWING

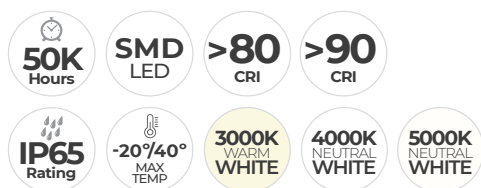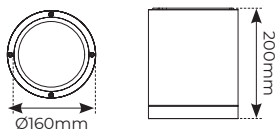


Surface Colour Options: **White**



PRODUCT DRAWING

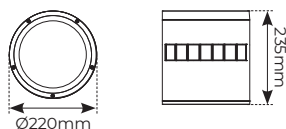

PRODUCT DRAWING



Accessories



Protection Net



Reflector

WATTAGE	35W (±10%)
LED CURRENT	DC 660mA
FLUX	3500lm
CCT	3000K
CRI	>90



WATTAGE	50W (±10%)
LED CURRENT	DC 940mA
FLUX	5000lm
CCT	3000K
CRI	>90

WATTAGE	75W (±10%)
LED CURRENT	DC 1400mA
FLUX	7500lm
CCT	3000K
CRI	>90

WATTAGE	100W (±10%)
LED CURRENT	DC 1900mA
FLUX	10000lm
CCT	3000K
CRI	>90

WATTAGE	120W (±10%)
LED CURRENT	DC 2300mA
FLUX	12000lm
CCT	3000K
CRI	>90


WATTAGE	150W (±10%)
LED CURRENT	DC 2800mA
FLUX	15000lm
CCT	3000K
CRI	>90

Deco 60X60 Panel



CODE	DS66DP40CC
POWER	40W
LUMEN	4000lm
BEAM ANGLE	120°
TEMPERATURE	-20°C~25°C
CCT CHANGE	3000K/4000K/6000K
CRI	Ra>80
DIFFUSER	PC Diffuser
VOLTAGE	220-240V
PRODUCT SIZE	L595*W595*H28mm
IP RATING	IP44
MATERIAL	Aluminium Frame
FINISH	White

PRODUCT DRAWING

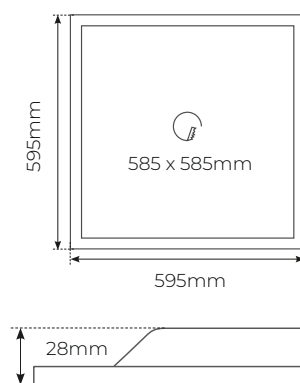


Deco 60x60 Panel IP




CODE	DS66DPIP40CC
POWER	40W
LUMEN	4000lm
BEAM ANGLE	120°
TEMPERATURE	-20°C~25°C
CCT CHANGE	3000K/4000K/6000K
CRI	Ra>80
DIFFUSER	PC Diffuser
VOLTAGE	220-240V
PRODUCT SIZE	L595*W595*H28mm
IP RATING	IP65
MATERIAL	Aluminium Frame
FINISH	White

PRODUCT DRAWING

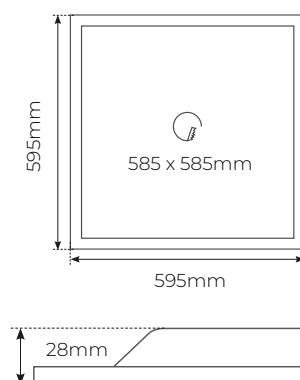


Deco 60x60 Clean Room Panel

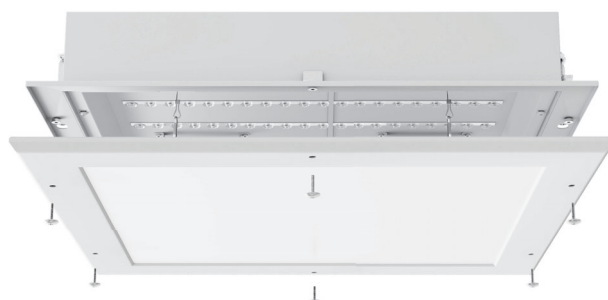


CODE	DS66DCRW31XX
POWER	26W
LUMEN	3120lm
BEAM ANGLE	110°
TEMPERATURE	-25°C~40°C
CCT	3000K/4000K/5000K/6500K
CRI	Ra>80
DIFFUSER	PC Diffuser
VOLTAGE	220-240V
PRODUCT SIZE	L595*W595*H100mm
IP RATING	IP65
MATERIAL	Alum. with Anti-bacterial coating
FINISH	White

PRODUCT DRAWING

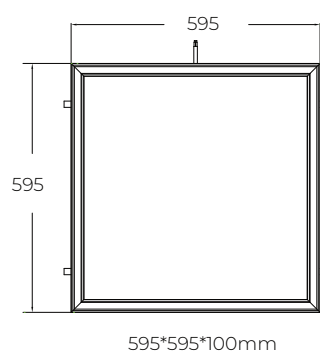


Deco 60x60 Clean Room Panel

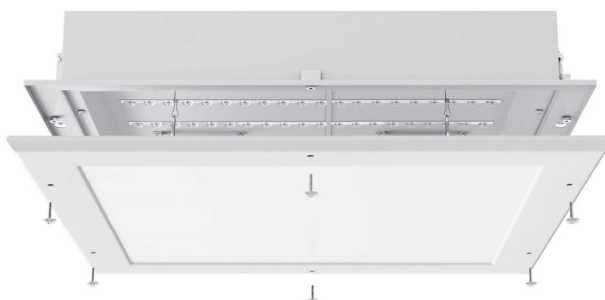


CODE	DS66DCRW36XX
POWER	30W
LUMEN	3600lm
BEAM ANGLE	110°
TEMPERATURE	-25°C~40°C
CCT	3000K/4000K/5000K/6500K
CRI	Ra>80
DIFFUSER	PC Diffuser
VOLTAGE	220-240V
PRODUCT SIZE	L595*W595*H100mm
IP RATING	IP65
MATERIAL	Alum. with Anti-bacterial coating
FINISH	White

PRODUCT DRAWING

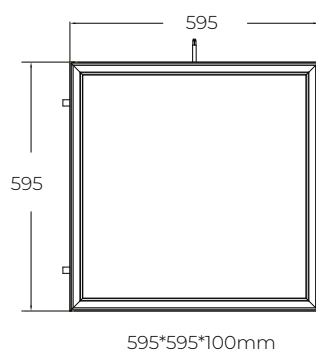


Deco 60x60 Clean Room Panel

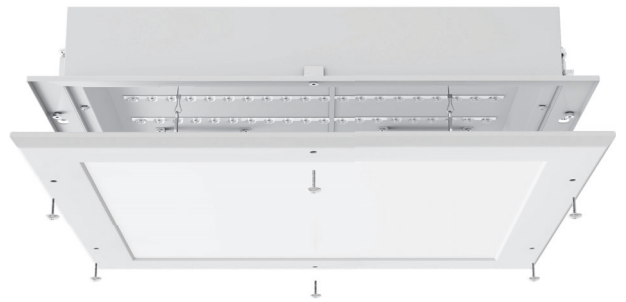


CODE	DS66DCRW43XX
POWER	36W
LUMEN	4320lm
BEAM ANGLE	110°
TEMPERATURE	-25°C~40°C
CCT	3000K/4000K/5000K/6500K
CRI	Ra>80
DIFFUSER	PC Diffuser
VOLTAGE	220-240V
PRODUCT SIZE	L595*W595*H100mm
IP RATING	IP65
MATERIAL	Alum. with Anti-bacterial coating
FINISH	White

PRODUCT DRAWING

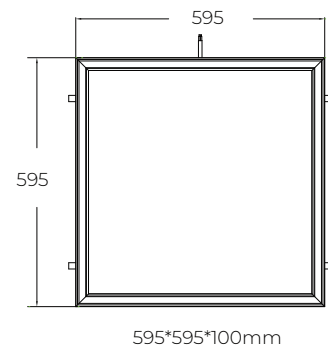


Deco 60x60 Clean Room Panel

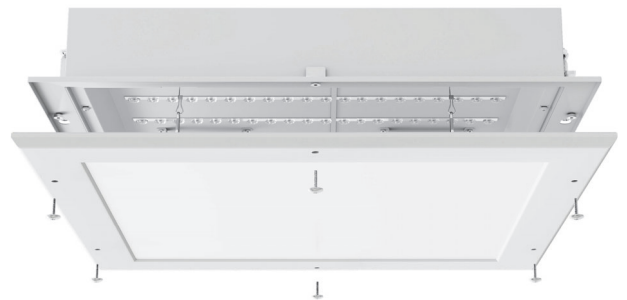


CODE	DS66DCRW48XX
POWER	40W
LUMEN	4800lm
BEAM ANGLE	110°
TEMPERATURE	-25°C~40°C
CCT	3000K/4000K/5000K/6500K
CRI	Ra>80
DIFFUSER	PC Diffuser
VOLTAGE	220-240V
PRODUCT SIZE	L595*W595*H100mm
IP RATING	IP65
MATERIAL	Alum. with Anti-bacterial coating
FINISH	White

PRODUCT DRAWING

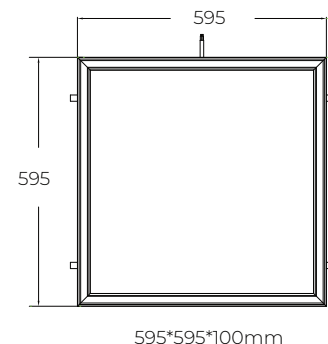


Deco Line 50 Linear System

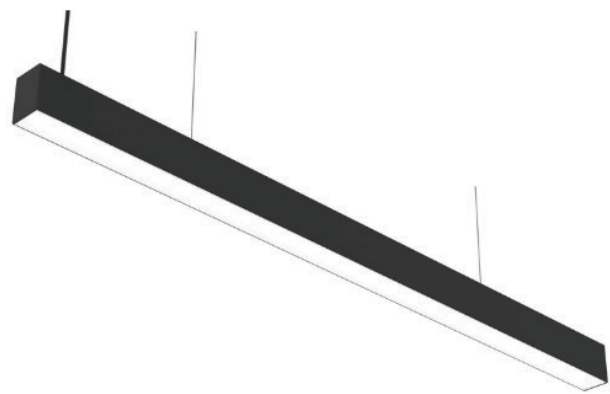


CODE	DS06L50W2640
POWER	20W
LUMEN	2600lm
BEAM ANGLE	110°
TEMPERATURE	-25°C~40°C
CCT	4000K
CRI	Ra>80
OPTICAL	PC Diffuser
VOLTAGE	220-240V
PRODUCT SIZE	L600*W50*H70mm
IP RATING	IP20
MATERIAL	Aluminium
FINISH	White/Black

PRODUCT DRAWING

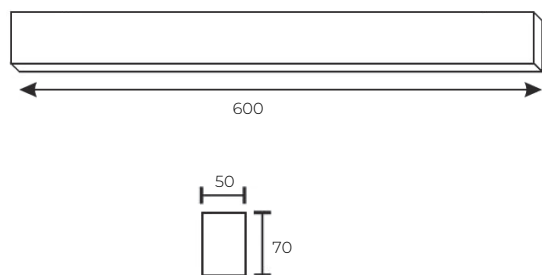


Deco Line 50 Linear System

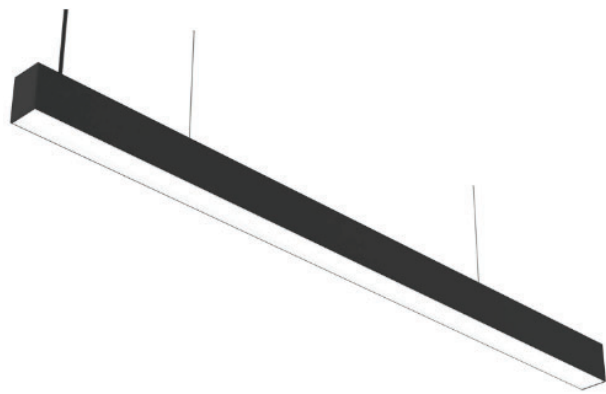

CODE	DS09L50W3940
POWER	30W
LUMEN	3900lm
BEAM ANGLE	110°
TEMPERATURE	-25°C~40°C
CCT	4000K
CRI	Ra>80
OPTICAL	PC Diffuser
VOLTAGE	220-240V
PRODUCT SIZE	L900*W50*H70mm
IP RATING	IP20
MATERIAL	Aluminium
FINISH	White/Black


PRODUCT DRAWING

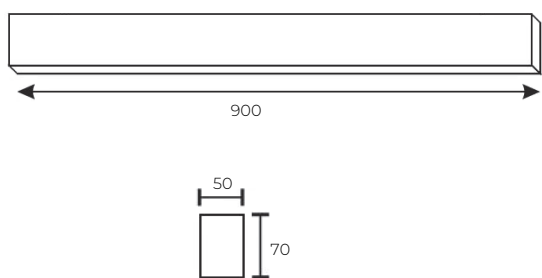

Deco Line 50 Linear System

CODE	DS12L50W5240
POWER	40W
LUMEN	5200lm
BEAM ANGLE	110°
TEMPERATURE	-25°C~40°C
CCT	4000K
CRI	Ra>80
OPTICAL	PC Diffuser
VOLTAGE	220-240V
PRODUCT SIZE	L1200*W50*H70mm
IP RATING	IP20
MATERIAL	Aluminium
FINISH	White/Black


PRODUCT DRAWING

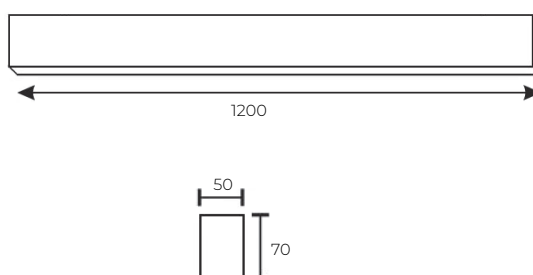


Deco Line 50 Linear System

CODE	DS15L50W6540
POWER	50W
LUMEN	6500lm
BEAM ANGLE	110°
TEMPERATURE	-25°C~40°C
CCT	4000K
CRI	Ra>80
OPTICAL	PC Diffuser
VOLTAGE	220-240V
PRODUCT SIZE	L1500*W50*H70mm
IP RATING	IP20
MATERIAL	Aluminium
FINISH	White/Black

PRODUCT DRAWING

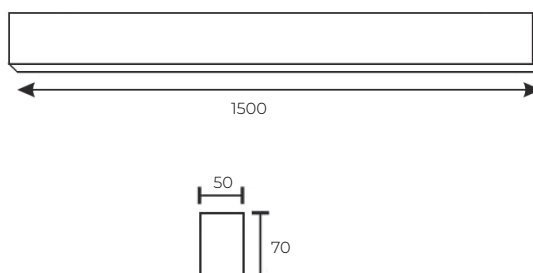


Deco Line 50 Accessories

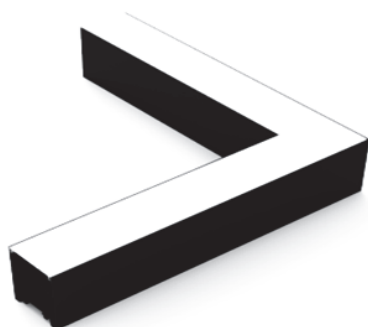

CODE	DSL50LC
ACCESSORIES NAME	L Connector
INSTALLATION METHOD	Surface mounted
MATERIAL	Aluminum
COLOUR	White/Black
DIMENSION	L425*W425*H70mm
POWER	24W 130lm/W
CCT	4000K

PRODUCT DRAWING

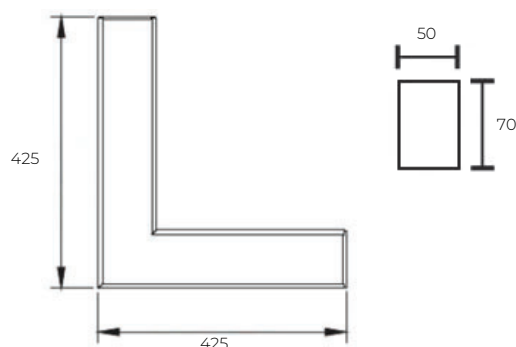


Deco Line 50 Accessories



CODE	DSL50TC
ACCESSORIES NAME	T Connector
INSTALLATION METHOD	Surface mounted
MATERIAL	Aluminum
COLOUR	White/Black
DIMENSION	L425*W425*H70mm
POWER	2.7W 120lm/W
CCT	4000K

PRODUCT DRAWING


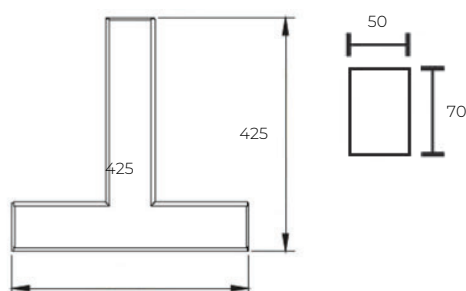


Deco Line 50 Accessories



CODE	DSL50XC
ACCESSORIES NAME	X Connector
INSTALLATION METHOD	Surface mounted
MATERIAL	Aluminum
COLOUR	White/Black
DIMENSION	L425*W425*H70mm
POWER	24W 130lm/W
CCT	4000K

PRODUCT DRAWING

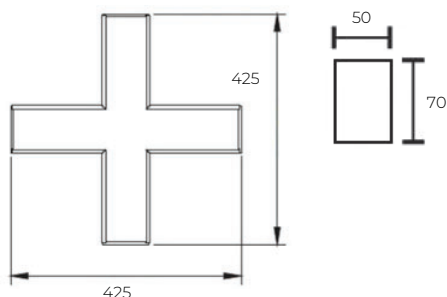

CODE	DSL50JC
ACCESSORIES NAME	Joint Connector
INSTALLATION METHOD	Surface mounted
MATERIAL	Aluminum




CODE	DSL50PC
ACCESSORIES NAME	Plug Connector
INSTALLATION METHOD	Surface mounted
MATERIAL	Rubber

Deco Flexible Striplight



CODE	DSFS5M05W64XX
POWER	4.8W/m
LUMEN	620lm/650lm/680lm
BEAM ANGLE	120°
TEMPERATURE	-25°C~40°C
CCT	2700K/3000K/4000K
CRI	Ra>80
DIFFUSER	Optic Lens
VOLTAGE	24V
PRODUCT SIZE	8x1.5mm 5M/Roll
IP RATING	IP20
MATERIAL	PCB
FINISH	White

PRODUCT DRAWING




Deco Flexible Striplight



CODE	DSFS5M10W128XX
POWER	9.6W/m
LUMEN	1270lm/1335lm/1390lm
BEAM ANGLE	120°
TEMPERATURE	-25°C~40°C
CCT	2700K/3000K/4000K
CRI	Ra>80
DIFFUSER	Optic Lens
VOLTAGE	24V
PRODUCT SIZE	8x1.6mm 5M/Roll
IP RATING	IP20
MATERIAL	PCB
FINISH	White

PRODUCT DRAWING

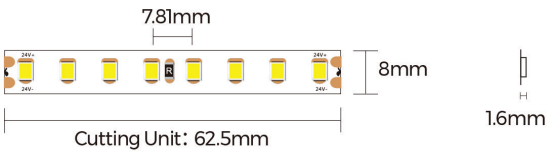


Deco Flexible Striplight



CODE	DSFS5M14W160XX
POWER	14.4W/m
LUMEN	1835lm/1935lm/2015lm
BEAM ANGLE	120°
TEMPERATURE	-25°C~40°C
CCT	2700K/3000K/4000K
CRI	Ra>80
DIFFUSER	Optic Lens
VOLTAGE	24V
PRODUCT SIZE	8x1.6mm 5M/Roll
IP RATING	IP20
MATERIAL	PCB
FINISH	White

PRODUCT DRAWING

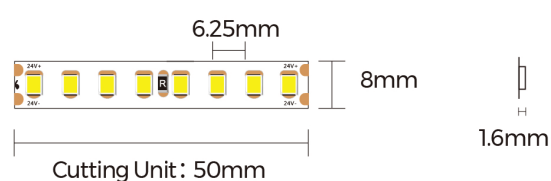


Deco Flexible Striplight



CODE	DSFS5M19W240XX
POWER	19W/m
LUMEN	2735lm/2880lm/3000lm
BEAM ANGLE	120°
TEMPERATURE	-25°C~40°C
CCT	2700K/3000K/4000K
CRI	Ra>80
DIFFUSER	Optic Lens
VOLTAGE	24V
PRODUCT SIZE	10x1.6mm 5M/Roll
IP RATING	IP20
MATERIAL	PCB
FINISH	White

PRODUCT DRAWING

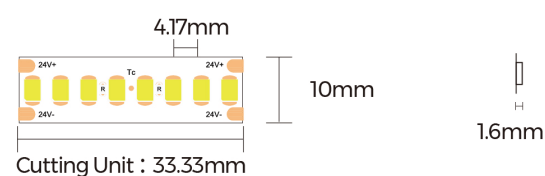


Deco Flexible Striplight IP65



CODE	DSFS5M05W64XXIP65
POWER	4.8W/m
LUMEN	620lm/650lm/680lm
BEAM ANGLE	120°
TEMPERATURE	-25°C~40°C
CCT	2700K/3000K/4000K
CRI	Ra>80
DIFFUSER	Extrusion
VOLTAGE	24V
PRODUCT SIZE	8x1.5mm 5M/Roll
IP RATING	IP65
MATERIAL	PCB
FINISH	White

PRODUCT DRAWING




Deco Flexible Striplight IP65



CODE	DSFS5M10W128XXIP65
POWER	9.6W/m
LUMEN	1270lm/1335lm/1390lm
BEAM ANGLE	120°
TEMPERATURE	-25°C~40°C
CCT	2700K/3000K/4000K
CRI	Ra>80
DIFFUSER	Extrusion
VOLTAGE	24V
PRODUCT SIZE	8x1.6mm 5M/Roll
IP RATING	IP65
MATERIAL	PCB
FINISH	White

PRODUCT DRAWING

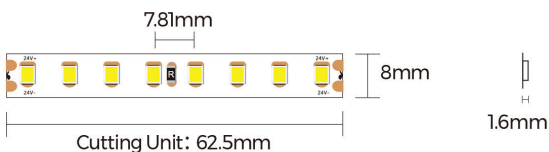


Deco Flexible Striplight IP65



CODE	DSFS5M14W160XXIP65
POWER	14.4W/m
LUMEN	1835lm/1935lm/2015lm
BEAM ANGLE	120°
TEMPERATURE	-25°C~40°C
CCT	2700K/3000K/4000K
CRI	Ra>80
DIFFUSER	Extrusion
VOLTAGE	24V
PRODUCT SIZE	8x1.6mm 5M/Roll
IP RATING	IP65
MATERIAL	PCB
FINISH	White

PRODUCT DRAWING

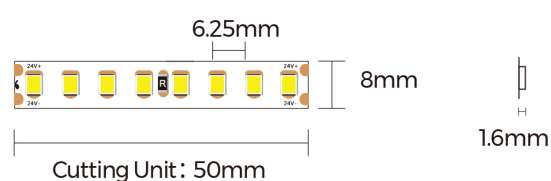


Deco Flexible Striplight IP65



CODE	DSFS5M19W240XXIP65
POWER	19W/m
LUMEN	2735lm/2880lm/3000lm
BEAM ANGLE	120°
TEMPERATURE	-25°C~40°C
CCT	2700K/3000K/4000K
CRI	Ra>80
DIFFUSER	Extrusion
VOLTAGE	24V
PRODUCT SIZE	10x1.6mm 5M/Roll
IP RATING	IP65
MATERIAL	PCB
FINISH	White

PRODUCT DRAWING

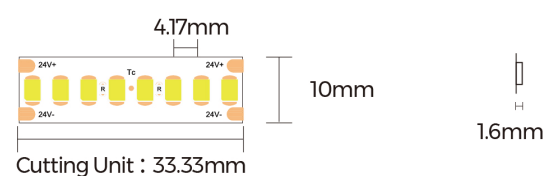


Deco Flexible Striplight IP67



CODE	DSFS5M05W64XXIP67
POWER	4.8W/m
LUMEN	620lm/650lm/680lm
BEAM ANGLE	120°
TEMPERATURE	-25°C~40°C
CCT	2700K/3000K/4000K
CRI	Ra>80
DIFFUSER	Extrusion
VOLTAGE	24V
PRODUCT SIZE	8x1.5mm 5M/Roll
IP RATING	IP67
MATERIAL	PCB
FINISH	White

PRODUCT DRAWING




Deco Flexible Striplight IP67



CODE	DSFS5M10W128XXIP67
POWER	9.6W/m
LUMEN	1270lm/1335lm/1390lm
BEAM ANGLE	120°
TEMPERATURE	-25°C~40°C
CCT	2700K/3000K/4000K
CRI	Ra>80
DIFFUSER	Extrusion
VOLTAGE	24V
PRODUCT SIZE	8x1.6mm 5M/Roll
IP RATING	IP67
MATERIAL	PCB
FINISH	White

PRODUCT DRAWING

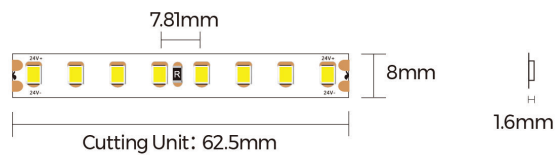


Deco Flexible Striplight IP67



CODE	DSFS5M14W160XXIP67
POWER	14.4W/m
LUMEN	1835lm/1935lm/2015lm
BEAM ANGLE	120°
TEMPERATURE	-25°C~40°C
CCT	2700K/3000K/4000K
CRI	Ra>80
DIFFUSER	Extrusion
VOLTAGE	24V
PRODUCT SIZE	8x1.6mm 5M/Roll
IP RATING	IP67
MATERIAL	PCB
FINISH	White

PRODUCT DRAWING

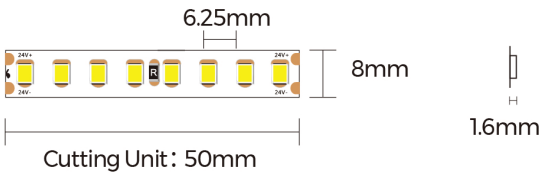


Deco Neon Flex Striplight



CODE	DSNF5M10TBXX
POWER	10W/m
LUMEN	680lm/750lm/840lm
BEAM ANGLE	120°
TEMPERATURE	-20°C~+55°C
CCT	2700K/3000K/4000K
CRI	Ra>90
DIFFUSER	Frosted Silicone Diffuser
VOLTAGE	24V
PRODUCT SIZE	12x13mm 5M/Roll
IP RATING	IP67
MATERIAL	Silicone
FINISH	White

PRODUCT DRAWING

TOP BEND




Deco Neon Flex Striplight




CODE	DSNF5M10SBXX
POWER	10W/m
LUMEN	538lm/538lm/669lm
BEAM ANGLE	120°
TEMPERATURE	-20°C~+55°C
CCT	2700K/3000K/4000K
CRI	Ra>90
DIFFUSER	Frosted Silicone Diffuser
VOLTAGE	24V
PRODUCT SIZE	12x17mm 5M/Roll
IP RATING	IP67
MATERIAL	Silicone
FINISH	White

PRODUCT DRAWING

SIDE BEND




Deco Neon Flex Striplight




CODE	DSNF5M073DLOXX
POWER	7.2W/m
LUMEN	420lm/440lm/455lm
BEAM ANGLE	120°
TEMPERATURE	-20°C~+55°C
CCT	2700K/3000K/4000K
CRI	Ra>90
DIFFUSER	Frosted Silicone Diffuser
VOLTAGE	24V
PRODUCT SIZE	15x15mm 5M/Roll
IP RATING	IP67
MATERIAL	Silicone
FINISH	White

PRODUCT DRAWING

3D BEND

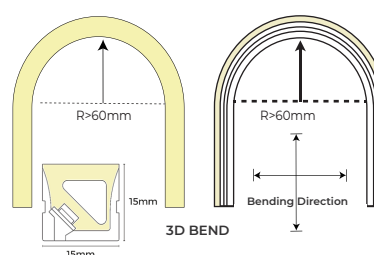


Deco Neon Flex Striplight



CODE	DSNF5M123DHOXX
POWER	12W/m
LUMEN	800lm/820lm/835lm
BEAM ANGLE	120°
TEMPERATURE	-20°C~+55°C
CCT	2700K/3000K/4000K
CRI	Ra>90
DIFFUSER	Frosted Silicone Diffuser
VOLTAGE	24V
PRODUCT SIZE	15x15mm 5M/Roll
IP RATING	IP67
MATERIAL	Silicone
FINISH	White

PRODUCT DRAWING

3D BEND

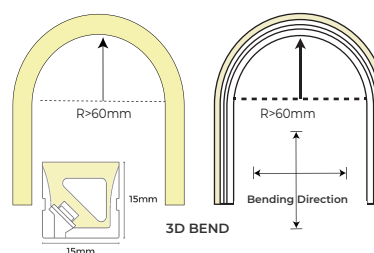


Deco Recessed Downlight



CODE	DS13DDL15CC
POWER	13W
LUMEN	1400lm/1500lm
BEAM ANGLE	80°
TEMPERATURE	-20°C~40°C
CCT CHANGE	3000K/4000K/6500K
CRI	Ra>80
DIFFUSER	PC Diffuser
VOLTAGE	220-240V
PRODUCT SIZE	Dia:146mm
IP RATING	IP54
MATERIAL	PC Housing Body
FINISH	White

PRODUCT DRAWING

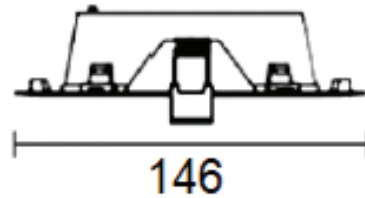


Deco Recessed Downlight



CODE	DS20DDL23CC
POWER	20W
LUMEN	2100lm/2300lm
BEAM ANGLE	80°
TEMPERATURE	-20°C~40°C
CCT CHANGE	3000K/4000K/6500K
CRI	Ra>80
DIFFUSER	PC Diffuser
VOLTAGE	220-240V
PRODUCT SIZE	Dia:146mm
IP RATING	IP54
MATERIAL	PC Housing Body
FINISH	White

PRODUCT DRAWING

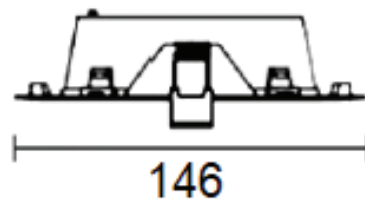


Deco Recessed Downlight



CODE	DS30DDL34CC
POWER	30W
LUMEN	3200lm/3400lm
BEAM ANGLE	100°
TEMPERATURE	-20°C~40°C
CCT CHANGE	3000K/4000K/6500K
CRI	Ra>80
DIFFUSER	PC Diffuser
VOLTAGE	220-240V
PRODUCT SIZE	Dia:146mm
IP RATING	IP54
MATERIAL	PC Housing Body
FINISH	White



PRODUCT DRAWING

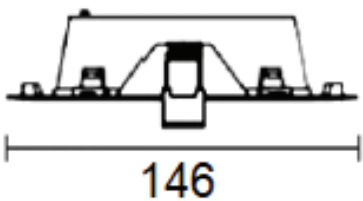


Deco Recessed Downlight



CODE	DS13DBVDL15CC
POWER	13W
LUMEN	1400lm/1500lm
BEAM ANGLE	80°
TEMPERATURE	-20°C~40°C
CCT CHANGE	3000K/4000K/6500K
CRI	Ra>80
DIFFUSER	PC Diffuser
VOLTAGE	220-240V
PRODUCT SIZE	Dia:176mm
IP RATING	IP54
MATERIAL	PC Housing Body
FINISH	White

PRODUCT DRAWING




Deco Recessed Downlight



CODE	DS20DBVDL23CC
POWER	20W
LUMEN	2100lm/2300lm
BEAM ANGLE	80°
TEMPERATURE	-20°C~40°C
CCT CHANGE	3000K/4000K/6500K
CRI	Ra>80
DIFFUSER	PC Diffuser
VOLTAGE	220-240V
PRODUCT SIZE	Dia:176mm
IP RATING	IP54
MATERIAL	PC Housing Body
FINISH	White

PRODUCT DRAWING




Deco Recessed Downlight



CODE	DS30DBVDL34CC
POWER	30W
LUMEN	3200lm/3400lm
BEAM ANGLE	100°
TEMPERATURE	-20°C~40°C
CCT CHANGE	3000K/4000K/6500K
CRI	Ra>80
DIFFUSER	PC Diffuser
VOLTAGE	220-240V
PRODUCT SIZE	Dia:176mm
IP RATING	IP54
MATERIAL	PC Housing Body
FINISH	White

PRODUCT DRAWING




Deco Recessed Downlight



CODE	DSI3DDRD15CC
POWER	13W
LUMEN	1400lm/1500lm
BEAM ANGLE	80°
TEMPERATURE	-20°C~40°C
CCT CHANGE	3000K/4000K/6500K
CRI	Ra>80
DIFFUSER	PC Diffuser
VOLTAGE	220-240V
PRODUCT SIZE	Dia:226mm
IP RATING	IP54
MATERIAL	PC Housing Body
FINISH	White

PRODUCT DRAWING




Deco Recessed Downlight



CODE	DS20DDRD123CC
POWER	20W
LUMEN	2100lm/2300lm
BEAM ANGLE	80°
TEMPERATURE	-20°C~40°C
CCT CHANGE	3000K/4000K/6500K
CRI	Ra>80
DIFFUSER	PC Diffuser
VOLTAGE	220-240V
PRODUCT SIZE	Dia:226mm
IP RATING	IP54
MATERIAL	PC Housing Body
FINISH	White

PRODUCT DRAWING




Deco Recessed Downlight



CODE	DS30DDRDRL34CC
POWER	30W
LUMEN	3200lm/3400lm
BEAM ANGLE	100°
TEMPERATURE	-20°C~40°C
CCT CHANGE	3000K/4000K/6500K
CRI	Ra>80
DIFFUSER	PC Diffuser
VOLTAGE	220-240V
PRODUCT SIZE	Dia:226mm
IP RATING	IP54
MATERIAL	PC Housing Body
FINISH	White

PRODUCT DRAWING




Deco Surfaced Downlight



CODE	DS20DSDL23CC
POWER	23W
LUMEN	2100lm/2300lm
BEAM ANGLE	100°
TEMPERATURE	-20°C~40°C
CCT CHANGE	3000K/4000K/6500K
CRI	Ra>80
DIFFUSER	PC Diffuser
VOLTAGE	220-240V
PRODUCT SIZE	Dia:200mm
IP RATING	IP54
MATERIAL	PC Housing Body
FINISH	White

PRODUCT DRAWING

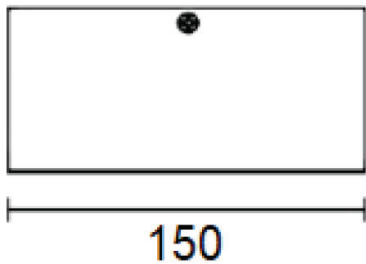


Deco Surface Downlight

DOWNLIGHT



CODE	DS30DSDL34CC
POWER	30W
LUMEN	3200lm/3400lm
BEAM ANGLE	100°
TEMPERATURE	-20°C~40°C
CCT CHANGE	3000K/4000K/6500K
CRI	Ra>80
DIFFUSER	PC Diffuser
VOLTAGE	220-240V
PRODUCT SIZE	Dia:150mm
IP RATING	IP54
MATERIAL	PC Housing Body
FINISH	White

PRODUCT DRAWING




Deco Circular Downlight



CODE	DS20CRDL24S40
POWER	20W
LUMEN	2400lm
BEAM ANGLE	36°
TEMPERATURE	-25°C~40°C
CCT CHANGE	3000K/4000K/6500K
CRI	Ra>80
DIFFUSER	PC Diffuser
VOLTAGE	220-240V
PRODUCT SIZE	Dia:130*H:150mm
IP RATING	IP44
MATERIAL	Aluminium housing body
FINISH	White

PRODUCT DRAWING

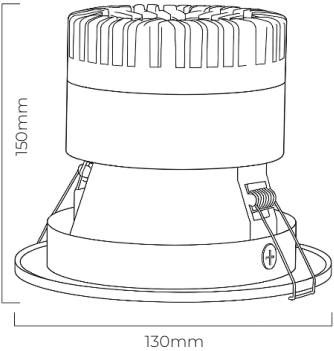


Deco Circular Black Downlight



CODE	DS16CBDL16S40
POWER	16W
LUMEN	1600lm
BEAM ANGLE	24°/36°
TEMPERATURE	-25°C~40°C
CCT CHANGE	3000K/4000K/6500K
CRI	Ra>80
DIFFUSER	PMMA Lens
VOLTAGE	220-240V
PRODUCT SIZE	Dia:108*H:95mm
IP RATING	IP44
MATERIAL	Aluminium housing body
FINISH	White + Black

PRODUCT DRAWING

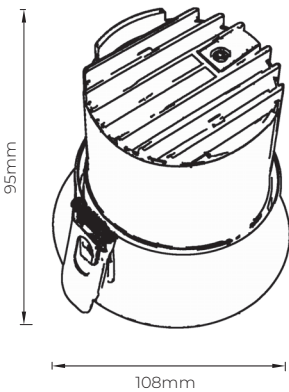


Deco Mirror Light



CODE	DS06DMLW14CC
POWER	15W
LUMEN	1400lm
BEAM ANGLE	145°
TEMPERATURE	-20°C~25°C
CCT CHANGE	3000K/4000K/6500K
CRI	Ra>80
DIFFUSER	PC Diffuser
VOLTAGE	220-240V
PRODUCT SIZE	L600*W52*H69mm
IP RATING	IP44
MATERIAL	Plastic injection housing
FINISH	White

PRODUCT DRAWING

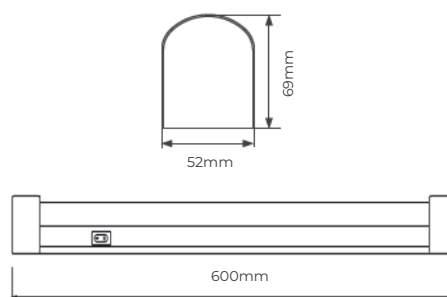


Deco Mirror Light



CODE	DS06DMLS14CC
POWER	15W
LUMEN	1400lm
BEAM ANGLE	145°
TEMPERATURE	-20°C~25°C
CCT CHANGE	3000K/4000K/6500K
CRI	Ra>80
DIFFUSER	PC Diffuser
VOLTAGE	220-240V
PRODUCT SIZE	L600*W52*H69mm
IP RATING	IP44
MATERIAL	Plastic injection housing
FINISH	Silver

PRODUCT DRAWING

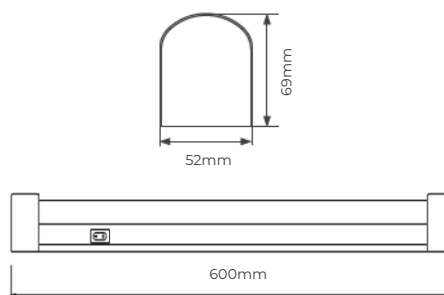


Deco Mirror Light



CODE	DS06DMLC14CC
POWER	15W
LUMEN	1400lm
BEAM ANGLE	145°
TEMPERATURE	-20°C~25°C
CCT CHANGE	3000K/4000K/6500K
CRI	Ra>80
DIFFUSER	PC Diffuser
VOLTAGE	220-240V
PRODUCT SIZE	L600*W52*H69mm
IP RATING	IP44
MATERIAL	Plastic injection housing
FINISH	Chrome

PRODUCT DRAWING

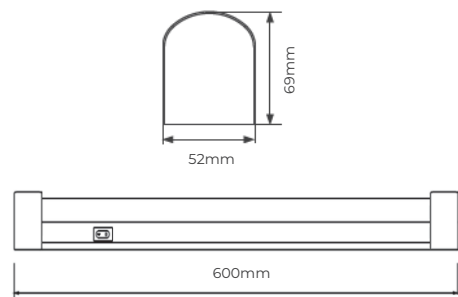


Deco Globo Round Bulkhead



CODE	DS15DGRB1040
POWER	10W
LUMEN	1000lm
BEAM ANGLE	120°
TEMPERATURE	-20°C~50°C
CCT	4000K
CRI	Ra>80
DIFFUSER	PC Diffuser
VOLTAGE	220-240V
PRODUCT SIZE	Dia:145mm x H:65mm
IP RATING	IP65
MATERIAL	Diecast Aluminium Housing
FINISH	Black

PRODUCT DRAWING

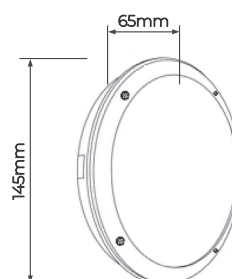


Deco Globo Round Bulkhead



CODE	DS15DGRERB1040
POWER	10W
LUMEN	500lm
BEAM ANGLE	120°
TEMPERATURE	-20°C~50°C
CCT	4000K
CRI	Ra>80
DIFFUSER	PC Diffuser
VOLTAGE	220-240V
PRODUCT SIZE	Dia:145mm x H:65mm
IP RATING	IP65
MATERIAL	Diecast aluminium Housing
FINISH	Black

PRODUCT DRAWING




Deco Globo Round Bulkhead



CODE	DS15DGRCRB1040
POWER	10W
LUMEN	1000lm
BEAM ANGLE	120°
TEMPERATURE	-20°C~50°C
CCT	4000K
CRI	Ra>80
DIFFUSER	PC Diffuser
VOLTAGE	220-240V
PRODUCT SIZE	Dia:145mm x H:65mm
IP RATING	IP65
MATERIAL	Diecast aluminium Housing
FINISH	Black

PRODUCT DRAWING

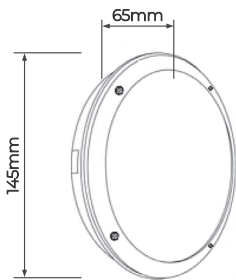


Deco Globo Round Bulkhead



CODE	DS15DGRRB1040
POWER	10W
LUMEN	1000lm
BEAM ANGLE	120°
TEMPERATURE	-20°C~50°C
CCT	4000K
CRI	Ra>80
DIFFUSER	PC Diffuser
VOLTAGE	220-240V
PRODUCT SIZE	Dia:145mm x H:65mm
IP RATING	IP65
MATERIAL	Diecast aluminium Housing
FINISH	Black

PRODUCT DRAWING




Deco Globo Oval Bulkhead



CODE	DS22DGOB1040
POWER	10W
LUMEN	1000lm
BEAM ANGLE	120°
TEMPERATURE	-20°C~50°C
CCT	4000K
CRI	Ra>80
DIFFUSER	PC Diffuser
VOLTAGE	220-240V
PRODUCT SIZE	L:220 x W:135 x H:65mm
IP RATING	IP65
MATERIAL	Diecast Aluminium Housing
FINISH	Black

PRODUCT DRAWING




Deco Globo Oval Bulkhead



CODE	DS22DGOERB1040
POWER	10W
LUMEN	500lm
BEAM ANGLE	120°
TEMPERATURE	-20°C~50°C
CCT	4000K
CRI	Ra>80
DIFFUSER	PC Diffuser
VOLTAGE	220-240V
PRODUCT SIZE	L:220 x W:135 x H:65mm
IP RATING	IP65
MATERIAL	Diecast aluminium Housing
FINISH	Black

PRODUCT DRAWING

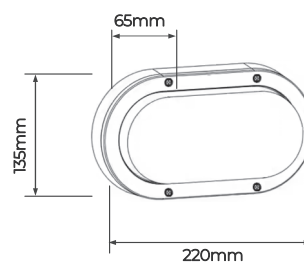


Deco Globo Oval Bulkhead



CODE	DS22DGOCRB1040
POWER	10W
LUMEN	1000lm
BEAM ANGLE	120°
TEMPERATURE	-20°C~50°C
CCT	4000K
CRI	Ra>80
DIFFUSER	PC Diffuser
VOLTAGE	220-240V
PRODUCT SIZE	L:220 x W:135 x H:65mm
IP RATING	IP65
MATERIAL	Diecast aluminium Housing
FINISH	Black

PRODUCT DRAWING




Deco Globo Oval Bulkhead



CODE	DS22DGOCRB1040
POWER	10W
LUMEN	1000lm
BEAM ANGLE	120°
TEMPERATURE	-20°C~50°C
CCT	4000K
CRI	Ra>80
DIFFUSER	PC Diffuser
VOLTAGE	220-240V
PRODUCT SIZE	L:220 x W:135 x H:65mm
IP RATING	IP65
MATERIAL	Diecast aluminium Housing
FINISH	Black

PRODUCT DRAWING

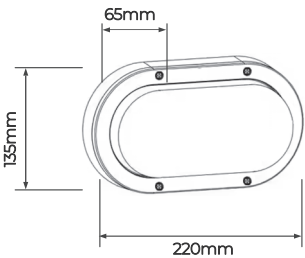


Rotundus Bulkhead



CODE	DS32RBWPCCC
POWER	9W/12W/14W
LUMEN	1080lm/1440lm/1680lm
BEAM ANGLE	120°
TEMPERATURE	-20°C~40°C
CCT CHANGE	3000K/4000K/5000K
CRI	Ra>80
DIFFUSER	PC Diffuser
VOLTAGE	220-240V
PRODUCT SIZE	Dia:320mm
IP RATING	IP65
MATERIAL	PC Housing Body
FINISH	White

PRODUCT DRAWING

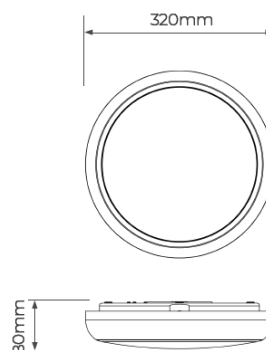


Rotundus Bulkhead



CODE	DS38RBWPCCC
POWER	12W/16W/20W
LUMEN	1440lm/1920lm/2400lm
BEAM ANGLE	120°
TEMPERATURE	-20°C~40°C
CCT CHANGE	3000K/4000K/5000K
CRI	Ra>80
DIFFUSER	PC Diffuser
VOLTAGE	220-240V
PRODUCT SIZE	Dia:380mm
IP RATING	IP65
MATERIAL	PC Housing Body
FINISH	White

PRODUCT DRAWING

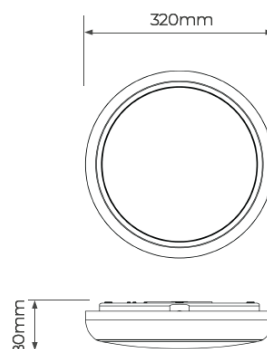


Deco Round Bulkhead



CODE	DS20DRB2040
POWER	20W
LUMEN	2000lm
BEAM ANGLE	120°
TEMPERATURE	-20°C~50°C
CCT	4000K
CRI	Ra>80
DIFFUSER	PC Diffuser
VOLTAGE	220-240V
PRODUCT SIZE	Dia:220mm
IP RATING	IP65
MATERIAL	Aluminium Housing Body
FINISH	White

PRODUCT DRAWING

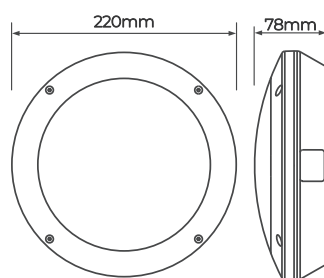


Deco Round Bulkhead



CODE	DS30DRB3040
POWER	30W
LUMEN	3000lm
BEAM ANGLE	120°
TEMPERATURE	-20°C~50°C
CCT	4000K
CRI	Ra>80
DIFFUSER	PC Diffuser
VOLTAGE	220-240V
PRODUCT SIZE	Dia:270mm
IP RATING	IP65
MATERIAL	Aluminium Housing Body
FINISH	White

PRODUCT DRAWING




Deco Round Bulkhead



CODE	DS20DRERB2040
POWER	20W
LUMEN	2000lm
BEAM ANGLE	120°
TEMPERATURE	-20°C~50°C
CCT	4000K
CRI	Ra>80
DIFFUSER	PC Diffuser
VOLTAGE	220-240V
PRODUCT SIZE	Dia:220mm
IP RATING	IP65
MATERIAL	Aluminium Housing Body
FINISH	White

PRODUCT DRAWING




Deco Round Bulkhead



CODE	DS30DRERB3040
POWER	30W
LUMEN	3000lm
BEAM ANGLE	120°
TEMPERATURE	-20°C~50°C
CCT	4000K
CRI	Ra>80
DIFFUSER	PC Diffuser
VOLTAGE	220-240V
PRODUCT SIZE	Dia:270mm
IP RATING	IP65
MATERIAL	Aluminium Housing Body
FINISH	White

PRODUCT DRAWING




Deco Round Bulkhead



CODE	DS20DRGRB2040
POWER	20W
LUMEN	2000lm
BEAM ANGLE	120°
TEMPERATURE	-20°C~50°C
CCT	4000K
CRI	Ra>80
DIFFUSER	PC Diffuser
VOLTAGE	220-240V
PRODUCT SIZE	Dia:220mm
IP RATING	IP65
MATERIAL	Aluminium Housing Body
FINISH	White

PRODUCT DRAWING




Deco Round Bulkhead



CODE	DS30DRGRB3040
POWER	30W
LUMEN	3000lm
BEAM ANGLE	120°
TEMPERATURE	-20°C~50°C
CCT	4000K
CRI	Ra>80
DIFFUSER	PC Diffuser
VOLTAGE	220-240V
PRODUCT SIZE	Dia:270mm
IP RATING	IP65
MATERIAL	Aluminium Housing Body
FINISH	White


PRODUCT DRAWING

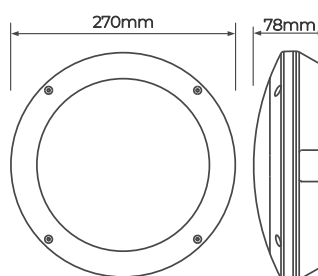

Deco Oval Bulkhead



PRODUCT DRAWING




CODE	DS20DOB2040
POWER	20W
LUMEN	2000lm
BEAM ANGLE	120°
TEMPERATURE	-20°C~50°C
CCT	4000K
CRI	Ra>80
DIFFUSER	PC Diffuser
VOLTAGE	220-240V
PRODUCT SIZE	L:217mm x H:70mm
IP RATING	IP65
MATERIAL	Aluminium Housing Body
FINISH	White

Deco Oval Bulkhead



PRODUCT DRAWING




CODE	DS30DOB3040
POWER	30W
LUMEN	3000lm
BEAM ANGLE	120°
TEMPERATURE	-20°C~50°C
CCT	4000K
CRI	Ra>80
DIFFUSER	PC Diffuser
VOLTAGE	220-240V
PRODUCT SIZE	L:280mm x H:90mm
IP RATING	IP65
MATERIAL	Aluminium Housing Body
FINISH	White

Deco Oval Bulkhead



CODE	DS20DOERB2040
POWER	20W
LUMEN	2000lm
BEAM ANGLE	120°
TEMPERATURE	-20°C~50°C
CCT	4000K
CRI	Ra>80
DIFFUSER	PC Diffuser
VOLTAGE	220-240V
PRODUCT SIZE	L:217mm x H:70mm
IP RATING	IP65
MATERIAL	Aluminium Housing Body
FINISH	White

PRODUCT DRAWING




Deco Oval Bulkhead



CODE	DS30DOERB3040
POWER	30W
LUMEN	3000lm
BEAM ANGLE	120°
TEMPERATURE	-20°C~50°C
CCT	4000K
CRI	Ra>80
DIFFUSER	PC Diffuser
VOLTAGE	220-240V
PRODUCT SIZE	L:280mm x H:90mm
IP RATING	IP65
MATERIAL	Aluminium Housing Body
FINISH	White

PRODUCT DRAWING

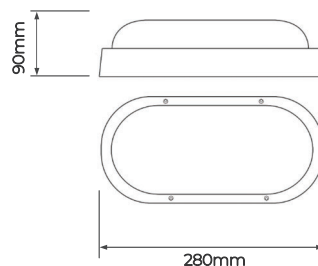


Deco Oval Bulkhead



CODE	DS20DOGRB2040
POWER	20W
LUMEN	2000lm
BEAM ANGLE	120°
TEMPERATURE	-20°C~50°C
CCT	4000K
CRI	Ra>80
DIFFUSER	PC Diffuser
VOLTAGE	220-240V
PRODUCT SIZE	L:217mm x H:70mm
IP RATING	IP65
MATERIAL	Aluminium Housing Body
FINISH	White

PRODUCT DRAWING




Deco Oval Bulkhead



CODE	DS30DOGRB3040
POWER	30W
LUMEN	3000lm
BEAM ANGLE	120°
TEMPERATURE	-20°C~50°C
CCT	4000K
CRI	Ra>80
DIFFUSER	PC Diffuser
VOLTAGE	220-240V
PRODUCT SIZE	L:280mm x H:90mm
IP RATING	IP65
MATERIAL	Aluminium Housing Body
FINISH	White

PRODUCT DRAWING




Modular Round Bulkhead



CODE	DS20MRB16CC
POWER	20W
LUMEN	1600lm
BEAM ANGLE	120°
TEMPERATURE	-20°C~40°C
CCT CHANGE	3000K/4000K/6500K
CRI	Ra>80
DIFFUSER	PC Diffuser
VOLTAGE	220-240V
PRODUCT SIZE	Dia:220mm
IP RATING	IP65
MATERIAL	PC Housing Body
FINISH	White + Black

PRODUCT DRAWING

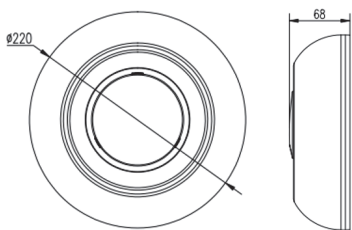


Modular Round Bulkhead



CODE	DS20MRB16CCPIR
POWER	20W
LUMEN	1600lm
BEAM ANGLE	120°
TEMPERATURE	-20°C~40°C
CCT CHANGE	3000K/4000K/6500K
CRI	Ra>80
DIFFUSER	PC Diffuser
VOLTAGE	220-240V
PRODUCT SIZE	Dia:220mm
IP RATING	IP65
MATERIAL	PC Housing Body
FINISH	White + Black

PRODUCT DRAWING

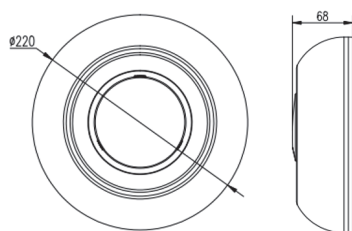


Modular Oval Bulkhead



CODE	DS18MOB14CC
POWER	18W
LUMEN	1440lm
BEAM ANGLE	120°
TEMPERATURE	-20°C~40°C
CCT CHANGE	3000K/4000K/6500K
CRI	Ra>80
DIFFUSER	PC Diffuser
VOLTAGE	220-240V
PRODUCT SIZE	L:212mm x H:61mm
IP RATING	IP65
MATERIAL	PC Housing Body
FINISH	White + Black

PRODUCT DRAWING

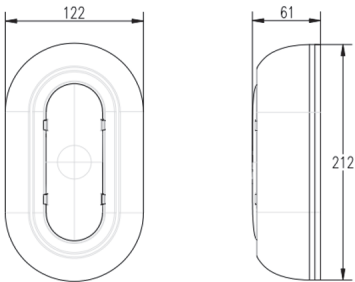


Modular Oval Bulkhead



CODE	DS18MOB14CCPIR
POWER	18W
LUMEN	1440lm
BEAM ANGLE	120°
TEMPERATURE	-20°C~40°C
CCT CHANGE	3000K/4000K/6500K
CRI	Ra>80
DIFFUSER	PC Diffuser
VOLTAGE	220-240V
PRODUCT SIZE	L:212mm x H:61mm
IP RATING	IP65
MATERIAL	PC Housing Body
FINISH	White + Black

PRODUCT DRAWING

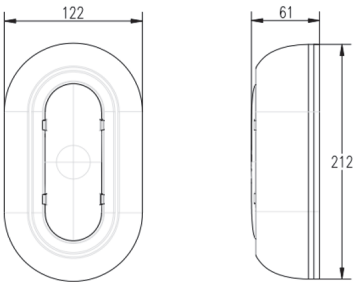


Deco Eclipse Bulkhead



CODE	DS25EBWPCCC
POWER	12W/18W
LUMEN	1620lm/2430lm
BEAM ANGLE	180°
TEMPERATURE	-25°C~45°C
CCT	3000/4000K/5000K
CRI	Ra>80
OPTICAL	PC Diffuser
VOLTAGE	220-240V 50/60Hz
PRODUCT SIZE	Dia:250*H:50mm
IP RATING	IP65
MATERIAL	PC housing body
FINISH	White

PRODUCT DRAWING

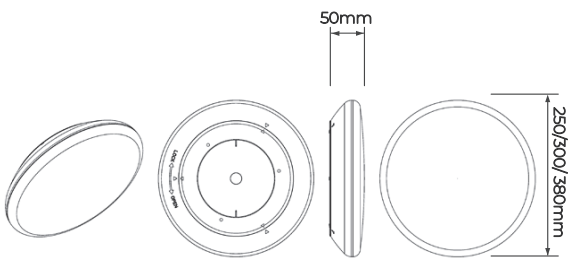


Deco Eclipse Bulkhead



CODE	DS30EBWPCCC
POWER	18W/25W
LUMEN	2430lm/3375lm
BEAM ANGLE	180°
TEMPERATURE	-25°C~45°C
CCT	3000/4000K/5000K
CRI	Ra>80
OPTICAL	PC Diffuser
VOLTAGE	220-240V 50/60Hz
PRODUCT SIZE	Dia:300*H:50mm
IP RATING	IP65
MATERIAL	PC housing body
FINISH	White

PRODUCT DRAWING

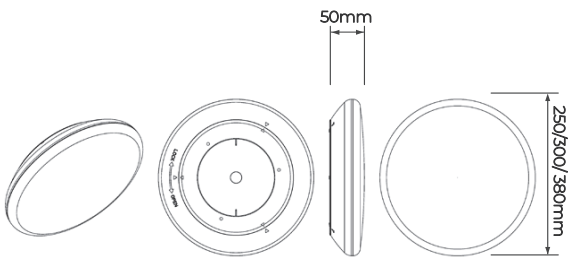


Deco Eclipse Bulkhead

BULKHEAD



CODE	DS38EBWPCCC
POWER	25W/35W
LUMEN	3375lm/4725lm
BEAM ANGLE	180°
TEMPERATURE	-25°C~45°C
CCT	3000K/4000K/5000K
CRI	Ra>80
OPTICAL	PC Diffuser
VOLTAGE	220-240V 50/60Hz
PRODUCT SIZE	Dia:380*H:50mm
IP RATING	IP65
MATERIAL	PC housing body
FINISH	White

PRODUCT DRAWING

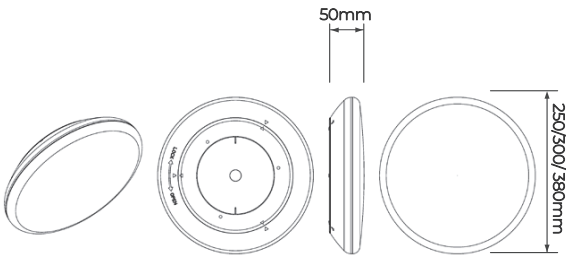


Deco Weatherproof W70



CODE	DS12DW70PCCC
POWER	19W/38W
LUMEN	2660lm/5320lm
BEAM ANGLE	120°
TEMPERATURE	-20°C~50°C
CCT CHANGE	3000K/4000K/6500K
CRI	Ra>80
DIFFUSER	PC Diffuser
VOLTAGE	220-240V
PRODUCT SIZE	L1240*W70*H73mm
IP RATING	IP66
MATERIAL	PC Body
FINISH	White

PRODUCT DRAWING

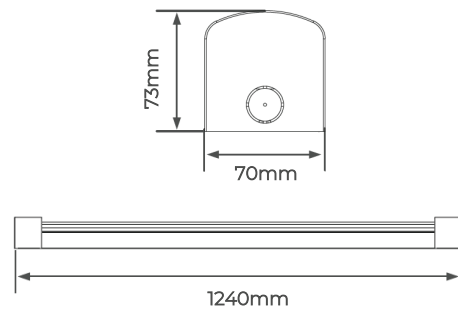


Deco Weatherproof W70



CODE	DS15DW70PCCC
POWER	28W/55W
LUMEN	3920lm/7700lm
BEAM ANGLE	120°
TEMPERATURE	-20°C~50°C
CCT CHANGE	3000K/4000K/6500K
CRI	Ra>80
DIFFUSER	PC Diffuser
VOLTAGE	220-240V
PRODUCT SIZE	L1540*W70*H73mm
IP RATING	IP66
MATERIAL	PC Body
FINISH	White

PRODUCT DRAWING

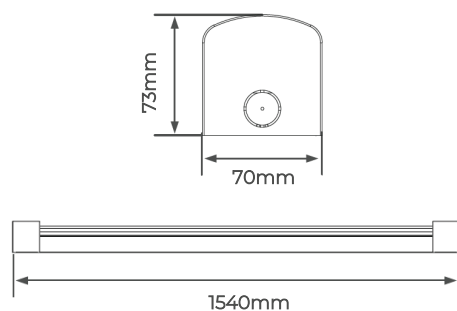


Deco Weatherproof W80



CODE	DS12DW80PCCC
POWER	23W/30W/35W/40W
LUMEN	2990lm/3900lm/4550lm/5200lm
BEAM ANGLE	120°
TEMPERATURE	-20°C~50°C
CCT CHANGE	3500K/4000K/5000K
CRI	Ra>80
DIFFUSER	PC Diffuser
VOLTAGE	220-240V
PRODUCT SIZE	L1200*W80*H68mm
IP RATING	IP66
MATERIAL	PC Body
FINISH	White

PRODUCT DRAWING

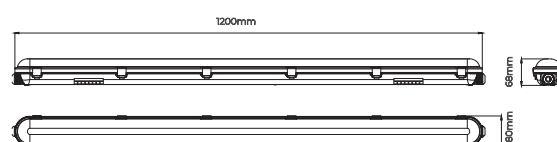


Deco Weatherproof W80



CODE	DS15DW80PCCC
POWER	35W/45W/50W/60W
LUMEN	4550lm/5850lm/6500lm/7800lm
BEAM ANGLE	120°
TEMPERATURE	-20°C~50°C
CCT CHANGE	3500K/4000K/5000K
CRI	Ra>80
DIFFUSER	PC Diffuser
VOLTAGE	220-240V
PRODUCT SIZE	L1500*W80*H68mm
IP RATING	IP66
MATERIAL	PC Diffuser
FINISH	White

PRODUCT DRAWING

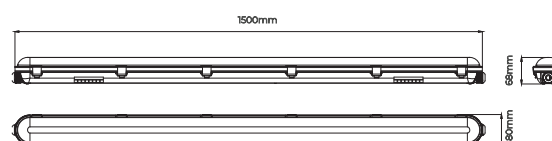


Deco Highbay HB2



CODE	DS25DHB2PCXXCC
POWER	100W/150W/200W
LUMEN	16000lm/24000lm/32000lm
BEAM ANGLE	60°/90°/110°
TEMPERATURE	-40°C~+50°C
CCT CHANGE	3000K/4000K/5000K
CRI	Ra>80
OPTICAL	Optic Lens
VOLTAGE	220-240V
PRODUCT SIZE	Dia:250*H:160mm
IP RATING	IP65
MATERIAL	Die-cast Aluminium
FINISH	Black

PRODUCT DRAWING

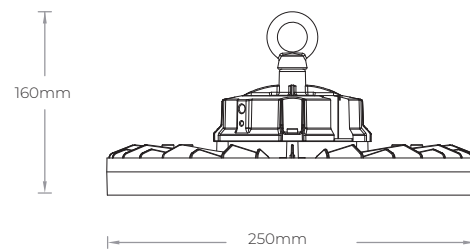


Deco Highbay HB2



CODE	DS32DHB2PCXXCC
POWER	150W/200W/240W
LUMEN	24000lm/34000lm/38400lm
BEAM ANGLE	60°/90°/110°
TEMPERATURE	-40°C~+50°C
CCT CHANGE	3000K/4000K/5000K
CRI	Ra>80
OPTICAL	Optic Lens
VOLTAGE	220-240V
PRODUCT SIZE	Dia:315*H:165mm
IP RATING	IP65
MATERIAL	Die-cast Aluminium
FINISH	Black

PRODUCT DRAWING

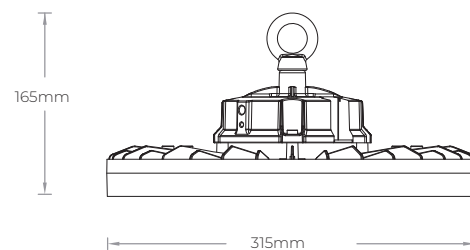


Deco Highbay HB3



CODE	DS25DHB3PCCC
POWER	60W/80W/100W
LUMEN	9600lm/12800lm/16000lm
BEAM ANGLE	60°/90°/110°
TEMPERATURE	-40°C~+50°C
CCT CHANGE	3000K/4000K/5000K
CRI	Ra>80
OPTICAL	Optic Lens
VOLTAGE	220-240V
PRODUCT SIZE	Dia:250*H:164mm
IP RATING	IP65
MATERIAL	Die-cast Aluminium
FINISH	Black

PRODUCT DRAWING

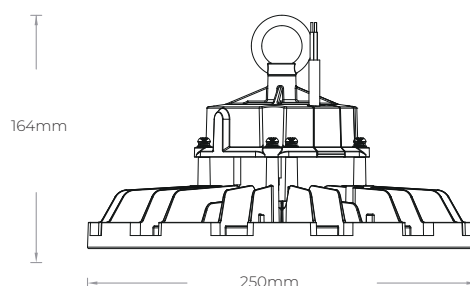


Deco Highbay HB3



CODE	DS33DHB3PCCC
POWER	150W/200W/240W
LUMEN	24000lm/32000lm/38400lm
BEAM ANGLE	60°/90°/110°
TEMPERATURE	-40°C~+50°C
CCT CHANGE	3000K/4000K/5000K
CRI	Ra>80
OPTICAL	Optic Lens
VOLTAGE	220-240V
PRODUCT SIZE	Dia:330*H:175mm
IP RATING	IP65
MATERIAL	Die-cast Aluminium
FINISH	Black

PRODUCT DRAWING

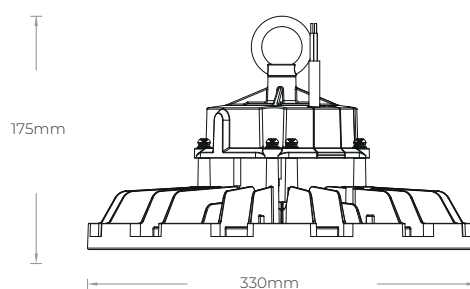


Deco G3 Linear Highbay



CODE	DSG3L03B17X100XX40
POWER	100W
LUMEN	17000lm
BEAM ANGLE	20°x80° / 90°
TEMPERATURE	-40°C~+50°C
CCT CHANGE	4000K/5000K/5700K
CRI	Ra>80
OPTICAL	Polycarbonate Lens
VOLTAGE	220-240V
PRODUCT SIZE	L397*W127*H:131mm
IP RATING	IP65
MATERIAL	Die-cast Aluminium
FINISH	Black

PRODUCT DRAWING

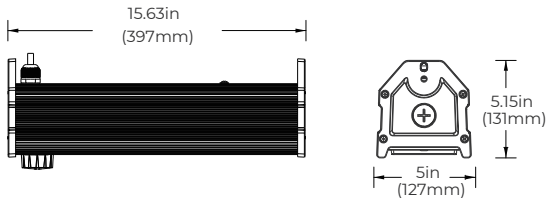


Deco G3 Linear Highbay



CODE	DSG3L06B34X200XX40
POWER	200W
LUMEN	34000lm
BEAM ANGLE	20°x80° / 90°
TEMPERATURE	-40°C~+50°C
CCT CHANGE	4000K/5000K/5700K
CRI	Ra>80
OPTICAL	Polycarbonate Lens
VOLTAGE	220-240V
PRODUCT SIZE	L627*W127*H:131mm
IP RATING	IP65
MATERIAL	Die-cast Aluminium
FINISH	Black

PRODUCT DRAWING

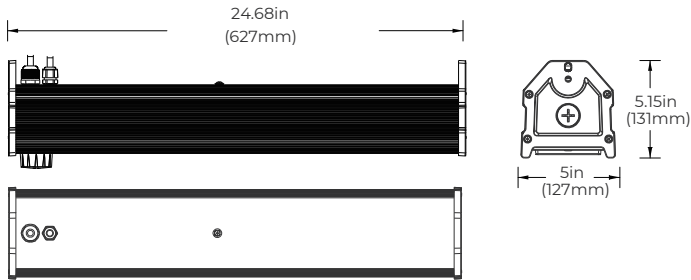

Deco G3 Linear Highbay



CODE	DSG3L10B51X300XX40
POWER	300W
LUMEN	51000lm
BEAM ANGLE	20°x80° / 90°
TEMPERATURE	-40°C~+50°C
CCT CHANGE	4000K/5000K/5700K
CRI	Ra>80
OPTICAL	Polycarbonate Lens
VOLTAGE	220-240V
PRODUCT SIZE	L1191*W127*H:131mm
IP RATING	IP65
MATERIAL	Die-cast Aluminium
FINISH	Black

PRODUCT DRAWING




Deco Tetra Floodlight



CODE	DS100TFLPCXXCC
POWER	50W/80W/100W
LUMEN	7000lm/11200lm/14000lm
BEAM ANGLE	30°/60°/90°/50°x100°
TEMPERATURE	-30°C~50°C
CCT CHANGE	3000K/4000K/5000K
CRI	Ra>80
OPTICAL	Polycarbonate + Glass
VOLTAGE	220-240V
PRODUCT SIZE	L:342*W:294*H:58mm
IP RATING	IP66
MATERIAL	Die-cast Aluminium
FINISH	Black

PRODUCT DRAWING

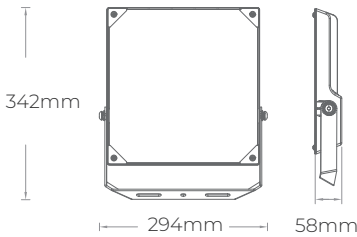


Deco Tetra Floodlight



CODE	DS200TFLPCXXCC
POWER	120W/150W/200W
LUMEN	16800lm/21000lm/28000lm
BEAM ANGLE	30°/60°/90°/50°x100°
TEMPERATURE	-30°C~50°C
CCT CHANGE	3000K/4000K/5000K
CRI	Ra>80
OPTICAL	Polycarbonate + Glass
VOLTAGE	220-240V
PRODUCT SIZE	L:390*W:350*H:64mm
IP RATING	IP66
MATERIAL	Die-cast Aluminium
FINISH	Black

PRODUCT DRAWING

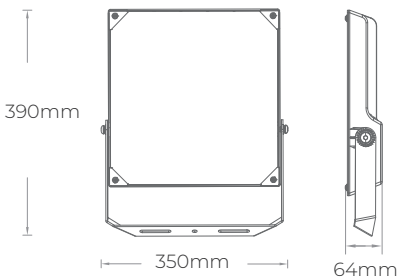


Deco Tetra Floodlight



CODE	DS300TFLPCXXCC
POWER	200W/240W/300W
LUMEN	28000lm/33600lm/42000lm
BEAM ANGLE	30°/60°/90°/50°x100°
TEMPERATURE	-30°C~50°C
CCT CHANGE	3000K/4000K/5000K
CRI	Ra>80
OPTICAL	Polycarbonate + Glass
VOLTAGE	220-240V
PRODUCT SIZE	L:462*W:400*H:78mm
IP RATING	IP66
MATERIAL	Die-cast Aluminium
FINISH	Black

PRODUCT DRAWING

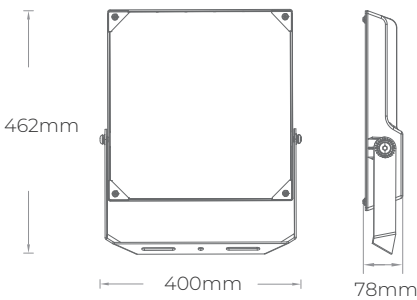


Deco Terra Projector



PRODUCT DRAWING

CODE	DS15TPLXS40
POWER	15W
LUMEN	1200lm
BEAM ANGLE	15°/25°/40°/60°
TEMPERATURE	-30°C~50°C
CCT CHANGE	3000K/4000K/5000K
CRI	Ra>80
OPTICAL	Glass Transparent
VOLTAGE	110-240 V / 50-60 Hz
PRODUCT SIZE	L:150*W:120*H:158mm
IP RATING	IP65
MATERIAL	High Purity Aluminium
FINISH	Grey

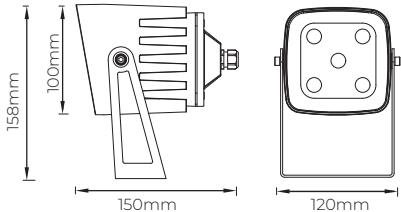


Deco Terra Projector



PRODUCT DRAWING


CODE	DS25TPLXS40
POWER	25W
LUMEN	2000lm
BEAM ANGLE	15°/25°/40°/60°
TEMPERATURE	-30°C~50°C
CCT CHANGE	4000K
CRI	Ra>80
OPTICAL	Glass Transparent
VOLTAGE	110-240 V / 50-60 Hz
PRODUCT SIZE	L:150*W:120*H:158mm
IP RATING	IP65
MATERIAL	High Purity Aluminium
FINISH	Grey

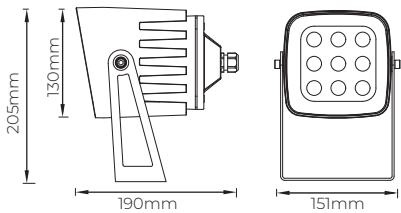

Deco Beta Buried Uplight



PRODUCT DRAWING

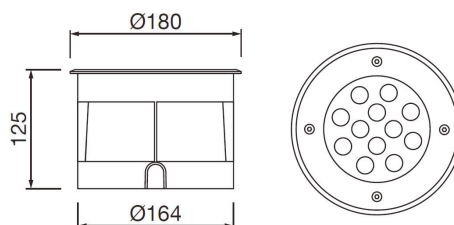


CODE	DSBBU25WXSXX
POWER	25W
LUMEN	2720lm/2670lm/2750lm/2240lm
BEAM ANGLE	10°/30°/45°/60°
TEMPERATURE	-30°C~+50°C
CCT CHANGE	3000K/4000K
CRI	Ra>80
OPTICAL	Transparent Glass
VOLTAGE	100-240V / 50-60 Hz
PRODUCT SIZE	Dia:180mm x H:125mm
IP RATING	IP67
MATERIAL	High purity aluminium
FINISH	Silver

Deco Beta Buried Uplight



PRODUCT DRAWING

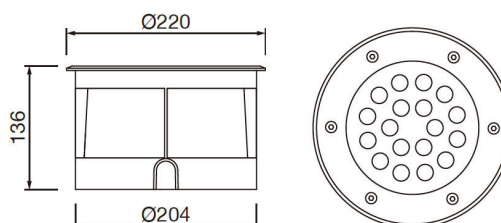


CODE	DSBBU40WXSXX
POWER	40W
LUMEN	3820lm/3970lm/3900lm/3210lm
BEAM ANGLE	10°/30°/45°/60°
TEMPERATURE	-30°C~+50°C
CCT CHANGE	3000K/4000K
CRI	Ra>80
OPTICAL	Transparent Glass
VOLTAGE	100-240V / 50-60 Hz
PRODUCT SIZE	Dia:220mm x H:136mm
IP RATING	IP65
MATERIAL	High purity aluminium
FINISH	Silver

Deco Beta Mini Uplight



CODE	DSBBMU3W120SXX
POWER	3W
LUMEN	270lm
BEAM ANGLE	120°
TEMPERATURE	-30°C~+50°C
CCT CHANGE	3000K/4000K
CRI	Ra>80
OPTICAL	Frosted Glass
VOLTAGE	24V AC/DC
PRODUCT SIZE	Dia:120mm x H:94mm
IP RATING	IP67
MATERIAL	High purity aluminium
FINISH	Silver

PRODUCT DRAWING

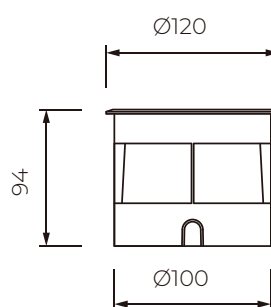


Deco Beta Mini Uplight



CODE	DSBBMU6WXXSXX
POWER	6W
LUMEN	540lm
BEAM ANGLE	25°/50°
TEMPERATURE	-30°C~+50°C
CCT CHANGE	3000K/4000K
CRI	Ra>80
OPTICAL	Transparent Glass
VOLTAGE	24V AC/DC
PRODUCT SIZE	Dia:120mm x H:94mm
IP RATING	IP65
MATERIAL	High purity aluminium
FINISH	Silver

PRODUCT DRAWING

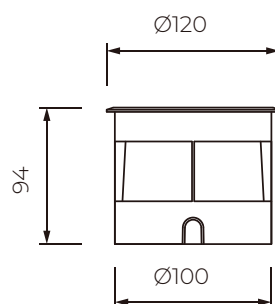


Tango Bollard

BOLLARD



CODE	DSTB1M20S40XX
POWER	20W
LUMEN	2000lm
BEAM ANGLE	T1 / T2 / T3 / T4
TEMPERATURE	-25°C~50°C
CCT	3000K/4000K/5000K
CRI	Ra>70
OPTICAL	PMMA Transparent Diffuser
VOLTAGE	220-240V
PRODUCT SIZE	L200*W200*H1000mm
IP RATING	IP66
MATERIAL	Aluminium Housing
FINISH	Black

PRODUCT DRAWING

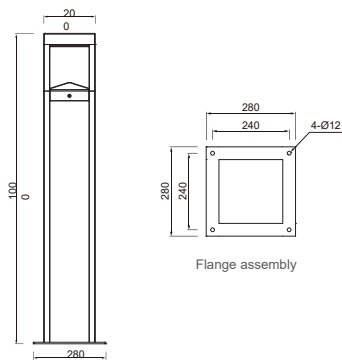


Tango Post

POST




CODE	DSTP2M60S40XX
POWER	60W
LUMEN	6000lm
BEAM ANGLE	TM1 / TM3
TEMPERATURE	-25°C~50°C
CCT	4000K
CRI	Ra>70
OPTICAL	PMMA Transparent Diffuser
VOLTAGE	220-240V
PRODUCT SIZE	L210*W210*H2200mm
IP RATING	IP66
MATERIAL	Aluminium Housing
FINISH	Silver

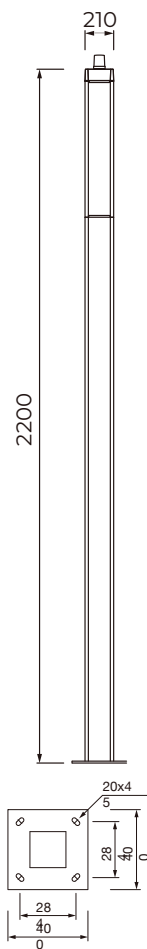

Deco Sigma Bollard Light



PRODUCT DRAWING




CODE	DSSBXXM15S40
POWER	15W
LUMEN	1050lm
BEAM ANGLE	Wide Symmetric
TEMPERATURE	-25°C~50°C
CCT CHANGE	4000K
CRI	Ra>70
OPTICAL	Glass Matt diffuser
VOLTAGE	220-240V
PRODUCT SIZE	H:600/800/1000mm; Dia: 118mm
IP RATING	IP66
MATERIAL	High purity aluminium housing
FINISH	Grey

Deco Sigma Bollard Light




PRODUCT DRAWING



CODE	DSSBXXM15S40DC
POWER	15W
LUMEN	1050lm
BEAM ANGLE	Wide Symmetric
TEMPERATURE	-25°C~50°C
CCT CHANGE	4000K
CRI	Ra>70
OPTICAL	Glass Matt diffuser
VOLTAGE	220-240V
PRODUCT SIZE	H:600/800/1000mm; Dia: 118mm
IP RATING	IP66
MATERIAL	High purity aluminium housing
FINISH	Black


Deco Sigma Post Light

CODE	DSSPXXM50S40
POWER	50W
LUMEN	6000lm
BEAM ANGLE	Wide Symmetric
TEMPERATURE	-25°C~50°C
CCT	4000K
CRI	Ra>70
OPTICAL	Glass matt diffuser
VOLTAGE	220-240V
PRODUCT SIZE	Dia:168*H:2000/2500mm
IP RATING	IP66
MATERIAL	High purity aluminium housing
FINISH	Grey

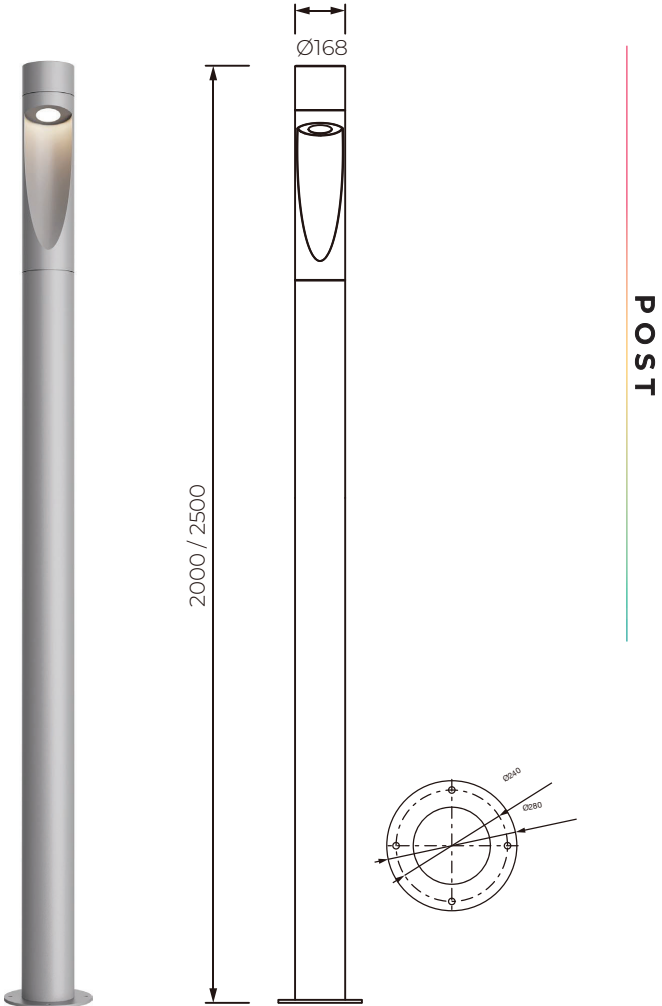

Deco Sigma Post Light


CODE	DSSPXXM100S40
POWER	100W
LUMEN	12000lm
BEAM ANGLE	Wide Symmetric
TEMPERATURE	-25°C~50°C
CCT	4000K
CRI	Ra>70
OPTICAL	Glass matt diffuser
VOLTAGE	220-240V
PRODUCT SIZE	Dia:168*H:2700/3500mm
IP RATING	IP66
MATERIAL	High purity aluminium housing
FINISH	Grey

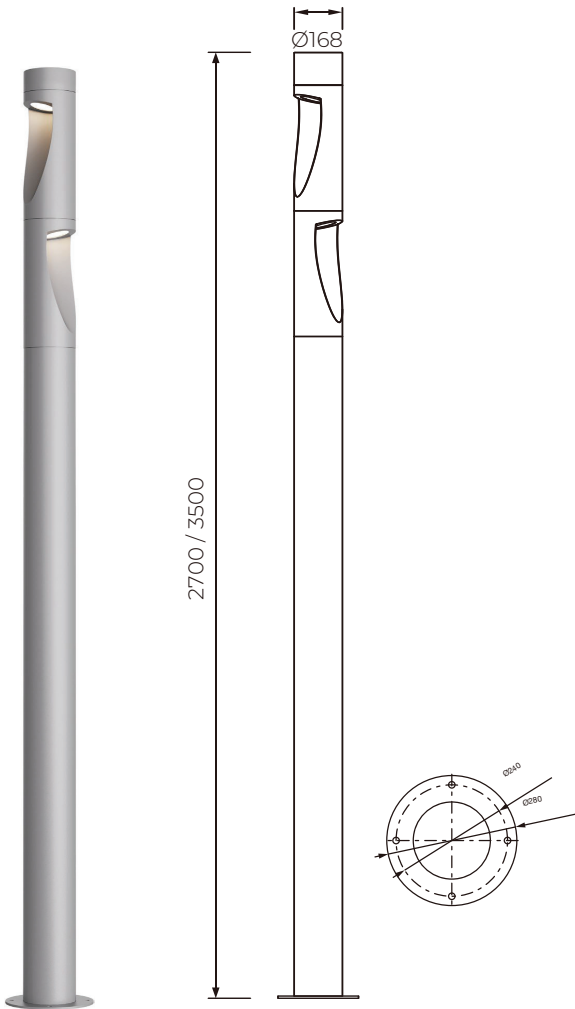

Deco Sigma Post Light

POST

CODE	DSSPXXM150S40
POWER	150W
LUMEN	18000lm
BEAM ANGLE	Wide Symmetric
TEMPERATURE	-25°C~50°C
CCT CHANGE	4000K
CRI	Ra>70
OPTICAL	Glass Matt diffuser
VOLTAGE	220-240V
PRODUCT SIZE	Dia:168*H:3500/4000/4500m
IP RATING	IP66
MATERIAL	High purity aluminium housing
FINISH	Grey

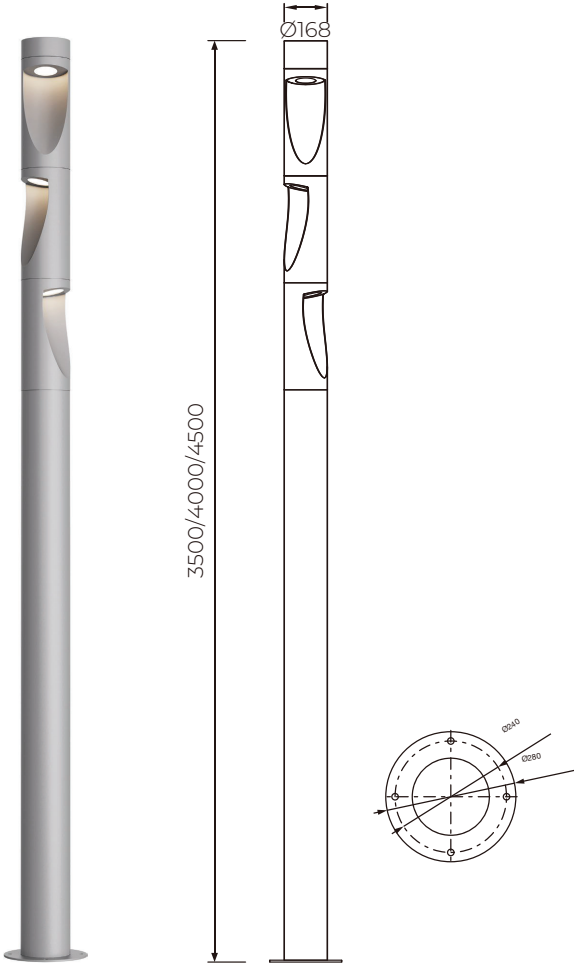


Deco Delta Bollard Light



CODE	DSDBXXM12SH40
POWER	12W
LUMEN	1500lm
BEAM ANGLE	Wide Symmetric
TEMPERATURE	-25°C~50°C
CCT	4000K
CRI	Ra>70
OPTICAL	Glass diffuser
VOLTAGE	220-240V
PRODUCT SIZE	L:205*W200*H800/1000mm
IP RATING	IP66
MATERIAL	High purity aluminium housing
FINISH	Grey

PRODUCT DRAWING

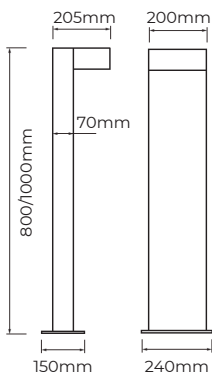


Deco Delta Bollard Light



CODE	DSDBXXM25SH40
POWER	25W
LUMEN	3750lm
BEAM ANGLE	Wide Symmetric
TEMPERATURE	-25°C~50°C
CCT	4000K
CRI	Ra>70
OPTICAL	Glass diffuser
VOLTAGE	220-240V
PRODUCT SIZE	L:300*W200*H800/1000mm
IP RATING	IP66
MATERIAL	High purity aluminium housing
FINISH	Black

PRODUCT DRAWING

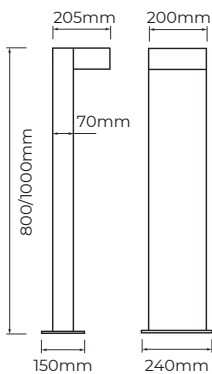


Deco Delta Bollard Light



CODE	DSDBXXM24DH40
POWER	2x12W
LUMEN	3000lm
BEAM ANGLE	Wide Symmetric
TEMPERATURE	-25°C~50°C
CCT CHANGE	4000K
CRI	Ra>70
OPTICAL	Glass diffuser
VOLTAGE	220-240V
PRODUCT SIZE	L:336*W200*H800/1000mm
IP RATING	IP66
MATERIAL	High purity aluminium housing
FINISH	Black

PRODUCT DRAWING

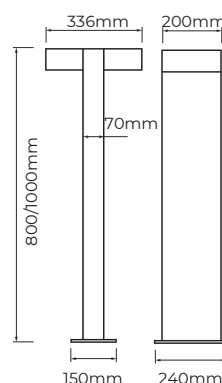


Deco Manhattan Bollard



CODE	DSMBFXXM20S40
POWER	25W
LUMEN	2000m
BEAM ANGLE	360°
TEMPERATURE	-25°C~50°C
CCT CHANGE	4000K
CRI	Ra>70
OPTICAL	PC Transparent diffuser
VOLTAGE	220-240V
PRODUCT SIZE	H:800/1000mm; Dia: 168mm
IP RATING	IP65
MATERIAL	High purity aluminium housing
FINISH	Black

PRODUCT DRAWING

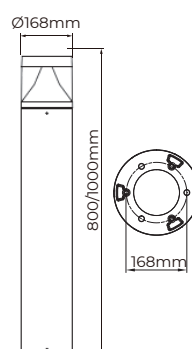


Deco Gamma Bollard Light



CODE	DSGBXXM09S180CC
POWER	9W
LUMEN	900lm
BEAM ANGLE	180°
TEMPERATURE	-25°C~50°C
CCT	2700K/4000K
CRI	Ra>70
OPTICAL	PC Transparent diffuser
VOLTAGE	220-240V
PRODUCT SIZE	H:300/500/800/1000mm; Dia: 118mm
IP RATING	IP66
MATERIAL	High purity aluminium housing
FINISH	Black

PRODUCT DRAWING

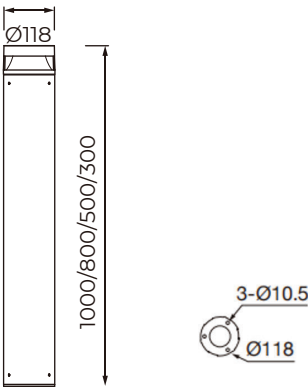


Deco Gamma Bollard Light



CODE	DSGBXXM12S360CC
POWER	12W
LUMEN	1200lm
BEAM ANGLE	360°
TEMPERATURE	-25°C~50°C
CCT	2700K/4000K
CRI	Ra>70
OPTICAL	PC Transparent diffuser
VOLTAGE	220-240V
PRODUCT SIZE	H:300/500/800/1000mm; Dia: 118mm
IP RATING	IP66
MATERIAL	High purity aluminium housing
FINISH	Black

PRODUCT DRAWING

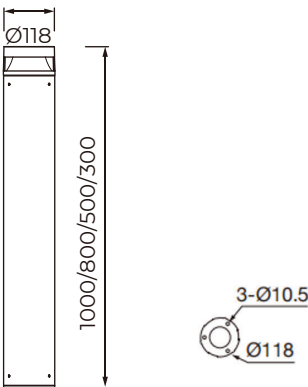


Deco Street Alpha

CODE	DSSA15MN24S40T1
POWER	15W
LUMEN	2400lm
BEAM ANGLE	T1 / T2 / T3 / T4 / T5
TEMPERATURE	-25°C~+50°C
CCT	4000K
CRI	Ra>70
OPTICAL	Glass transparent diffuser
VOLTAGE	100-277V / 50-60Hz
PRODUCT SIZE	L490*W176*H86mm
IP RATING	IP66
MATERIAL	Die-cast Aluminium
FINISH	Black



MINI

PRODUCT DRAWING

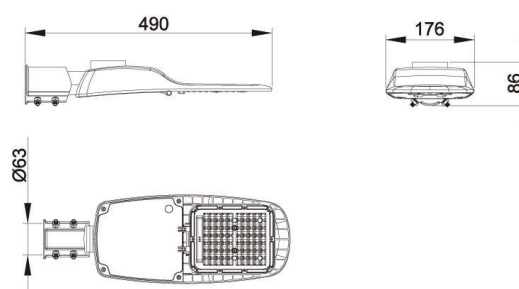


Deco Street Alpha

CODE	DSSA20MN32S40T1
POWER	20W
LUMEN	3200lm
BEAM ANGLE	T1 / T2 / T3 / T4 / T5
TEMPERATURE	-25°C~+50°C
CCT	4000K
CRI	Ra>70
OPTICAL	Glass transparent diffuser
VOLTAGE	100-277V / 50-60Hz
PRODUCT SIZE	L490*W176*H86mm
IP RATING	IP66
MATERIAL	Die-cast Aluminium
FINISH	Black



MINI

PRODUCT DRAWING

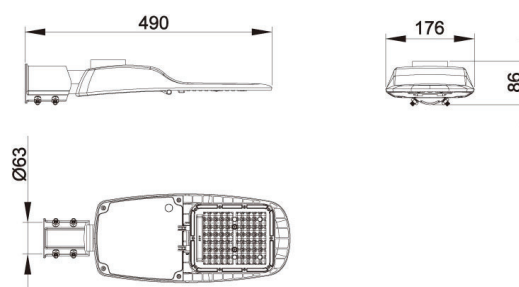


Deco Street Alpha



MINI

CODE	DSSA30MN48S40T1
POWER	30W
LUMEN	4800lm
BEAM ANGLE	T1 / T2 / T3 / T4 / T5
TEMPERATURE	-25°C~+50°C
CCT	4000K
CRI	Ra>70
OPTICAL	Glass transparent diffuser
VOLTAGE	100-277V / 50-60Hz
PRODUCT SIZE	L490*W176*H86mm
IP RATING	IP66
MATERIAL	Die-cast Aluminium
FINISH	Black

PRODUCT DRAWING

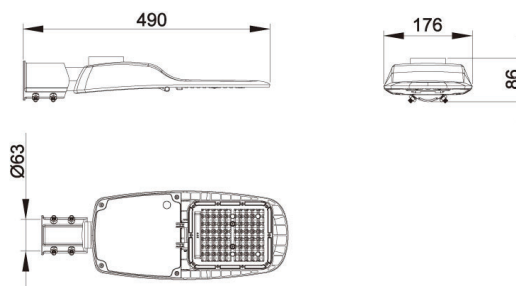


Deco Street Alpha



MINI

CODE	DSSA40MN64S40T1
POWER	40W
LUMEN	6400lm
BEAM ANGLE	T1 / T2 / T3 / T4 / T5
TEMPERATURE	-25°C~+50°C
CCT	4000K
CRI	Ra>70
OPTICAL	Glass transparent diffuser
VOLTAGE	100-277V / 50-60Hz
PRODUCT SIZE	L490*W176*H86mm
IP RATING	IP66
MATERIAL	Die-cast Aluminium
FINISH	Black

PRODUCT DRAWING

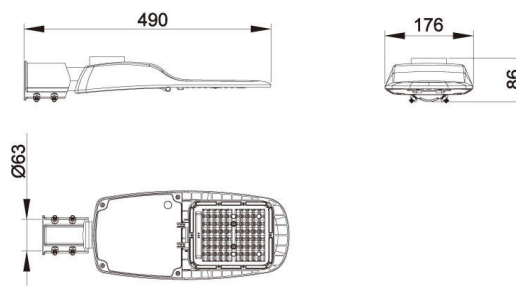


Deco Street Alpha

CODE	DSSA50MN80S40T1
POWER	50W
LUMEN	8000lm
BEAM ANGLE	T1 / T2 / T3 / T4 / T5
TEMPERATURE	-25°C~+50°C
CCT	4000K
CRI	Ra>70
OPTICAL	Glass transparent diffuser
VOLTAGE	100-277V / 50-60Hz
PRODUCT SIZE	L490*W176*H86mm
IP RATING	IP66
MATERIAL	Die-cast Aluminium
FINISH	Black



MINI

PRODUCT DRAWING

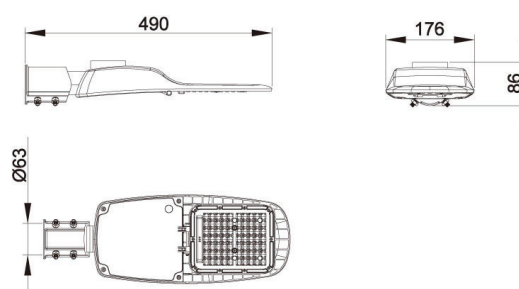


Deco Street Alpha

CODE	DSSA60MN96S40T1
POWER	60W
LUMEN	9600lm
BEAM ANGLE	T1 / T2 / T3 / T4 / T5
TEMPERATURE	-25°C~+50°C
CCT	4000K
CRI	Ra>70
OPTICAL	Glass transparent diffuser
VOLTAGE	100-277V / 50-60Hz
PRODUCT SIZE	L490*W176*H86mm
IP RATING	IP66
MATERIAL	Die-cast Aluminium
FINISH	Black



MINI

PRODUCT DRAWING

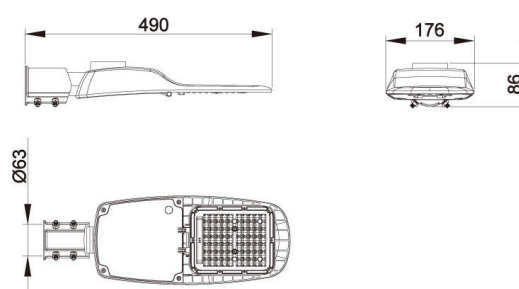


Deco Street Alpha



MINI PLUS

CODE	DSSA80MP128S40T1
POWER	80W
LUMEN	12800lm
BEAM ANGLE	T1 / T2 / T3 / T4 / T5
TEMPERATURE	-25°C~+50°C
CCT	4000K
CRI	Ra>70
OPTICAL	Glass transparent diffuser
VOLTAGE	100-277V / 50-60Hz
PRODUCT SIZE	L605*W240*H89mm
IP RATING	IP66
MATERIAL	Die-cast Aluminium
FINISH	Black

PRODUCT DRAWING

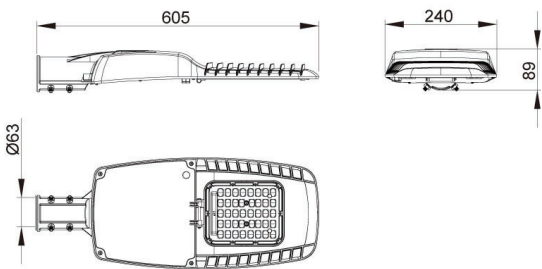


Deco Street Alpha



MINI PLUS

CODE	DSSA100MP160S40T1
POWER	100W
LUMEN	16000lm
BEAM ANGLE	T1 / T2 / T3 / T4 / T5
TEMPERATURE	-25°C~+50°C
CCT	4000K
CRI	Ra>70
OPTICAL	Glass transparent diffuser
VOLTAGE	100-277V / 50-60Hz
PRODUCT SIZE	L605*W240*H89mm
IP RATING	IP66
MATERIAL	Die-cast Aluminium
FINISH	Black

PRODUCT DRAWING

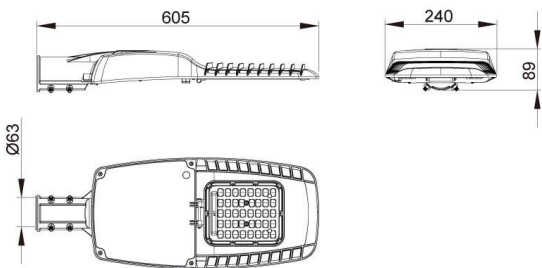


Deco Street Alpha



MIDI

PRODUCT DRAWING

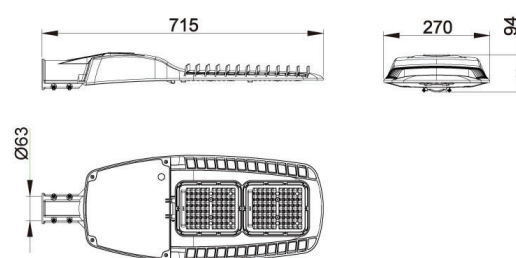


CODE	DSSA120MD192S40T1
POWER	120W
LUMEN	19200lm
BEAM ANGLE	T1 / T2 / T3 / T4 / T5
TEMPERATURE	-25°C~+50°C
CCT	4000K
CRI	Ra>70
OPTICAL	Glass transparent diffuser
VOLTAGE	100-277V / 50-60Hz
PRODUCT SIZE	L715*W270*H94mm
IP RATING	IP66
MATERIAL	Die-cast Aluminium
FINISH	Black

Deco Street Alpha



MIDI

PRODUCT DRAWING

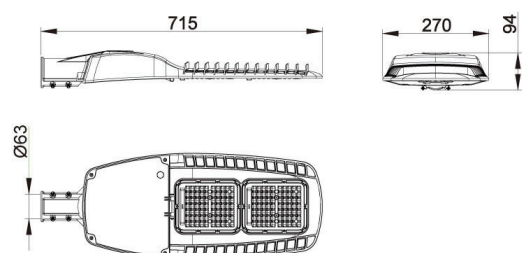

CODE	DSSA150MD240S40T1
POWER	150W
LUMEN	24000lm
BEAM ANGLE	T1 / T2 / T3 / T4 / T5
TEMPERATURE	-25°C~+50°C
CCT	4000K
CRI	Ra>70
OPTICAL	Glass transparent diffuser
VOLTAGE	100-277V / 50-60Hz
PRODUCT SIZE	L715*W270*H94mm
IP RATING	IP66
MATERIAL	Die-cast Aluminium
FINISH	Black


Deco Street Alpha



MAXI

CODE	DSSA180MA280S40T1
POWER	180W
LUMEN	28000lm
BEAM ANGLE	T1 / T2 / T3 / T4 / T5
TEMPERATURE	-25°C~+50°C
CCT	4000K
CRI	Ra>70
OPTICAL	Glass transparent diffuser
VOLTAGE	100-277V / 50-60Hz
PRODUCT SIZE	L800*W318*H91mm
IP RATING	IP66
MATERIAL	Die-cast Aluminium
FINISH	Black

PRODUCT DRAWING

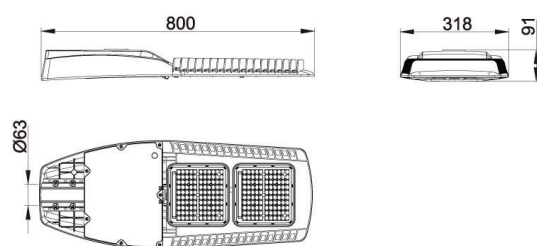


Deco Street Alpha



MAXI

CODE	DSSA200MA320S40T1
POWER	200W
LUMEN	32000lm
BEAM ANGLE	T1 / T2 / T3 / T4 / T5
TEMPERATURE	-25°C~+50°C
CCT	4000K
CRI	Ra>70
OPTICAL	Glass transparent diffuser
VOLTAGE	100-277V / 50-60Hz
PRODUCT SIZE	L800*W318*H91mm
IP RATING	IP66
MATERIAL	Die-cast Aluminium
FINISH	Black

PRODUCT DRAWING

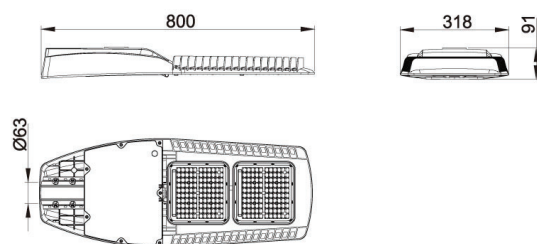


Deco Street Alpha



MAXI

PRODUCT DRAWING

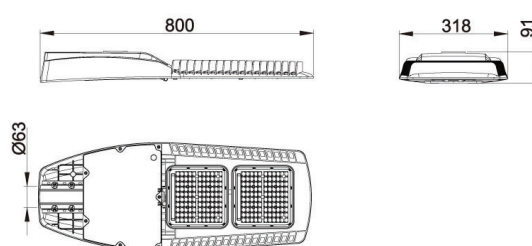


CODE	DSSA220MA352S40T1
POWER	220W
LUMEN	35200lm
BEAM ANGLE	T1 / T2 / T3 / T4 / T5
TEMPERATURE	-25°C~+50°C
CCT	4000K
CRI	Ra>70
OPTICAL	Glass transparent diffuser
VOLTAGE	100-277V / 50-60Hz
PRODUCT SIZE	L800*W318*H91mm
IP RATING	IP66
MATERIAL	Die-cast Aluminium
FINISH	Black

Deco Street Alpha



MAXI

PRODUCT DRAWING

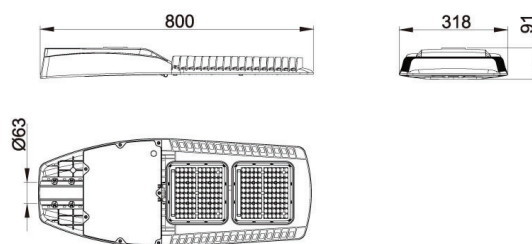

CODE	DSSA240MA384S40T1
POWER	240W
LUMEN	38400lm
BEAM ANGLE	T1 / T2 / T3 / T4 / T5
TEMPERATURE	-25°C~+50°C
CCT	4000K
CRI	Ra>70
OPTICAL	Glass transparent diffuser
VOLTAGE	100-277V / 50-60Hz
PRODUCT SIZE	L800*W318*H91mm
IP RATING	IP66
MATERIAL	Die-cast Aluminium
FINISH	Black

Deco Street Alpha




MAXI

STREET LIGHT

CODE	DSSA300MA480S40T1
POWER	300W
LUMEN	48000lm
BEAM ANGLE	T1 / T2 / T3 / T4 / T5
TEMPERATURE	-25°C~+50°C
CCT	4000K
CRI	Ra>70
OPTICAL	Glass transparent diffuser
VOLTAGE	100-277V / 50-60Hz
PRODUCT SIZE	L800*W318*H91mm
IP RATING	IP66
MATERIAL	Die-cast Aluminium
FINISH	Black

PRODUCT DRAWING

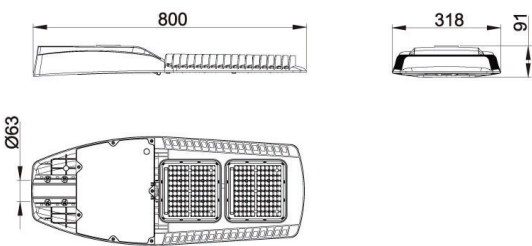


Deco Street Alpha-Lite



MICRO

PRODUCT DRAWING

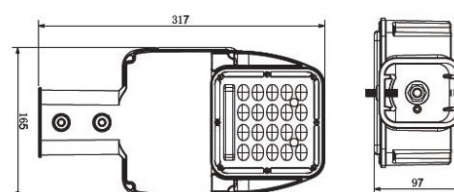


CODE	DSAL20MC34S40T1
POWER	20W
LUMEN	3400lm
BEAM ANGLE	T1 / T2 / T3 / T4
TEMPERATURE	-25°C~+50°C
CCT	4000K
CRI	Ra>70
OPTICAL	Glass transparent diffuser
VOLTAGE	100-277V / 50-60Hz
PRODUCT SIZE	L317*W165*H97mm
IP RATING	IP66
MATERIAL	Die-cast Aluminium
FINISH	Grey

Deco Street Alpha-Lite



MICRO

PRODUCT DRAWING

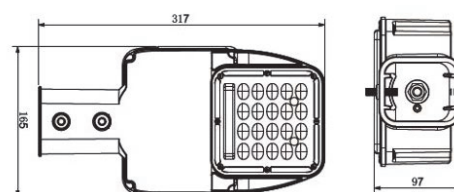


CODE	DSAL30MC51S40T1
POWER	30W
LUMEN	5100lm
BEAM ANGLE	T1 / T2 / T3 / T4
TEMPERATURE	-25°C~+50°C
CCT	4000K
CRI	Ra>70
OPTICAL	Glass transparent diffuser
VOLTAGE	100-277V / 50-60Hz
PRODUCT SIZE	L317*W165*H97mm
IP RATING	IP66
MATERIAL	Die-cast Aluminium
FINISH	Grey

Deco Street Alpha-Lite



MINI

PRODUCT DRAWING

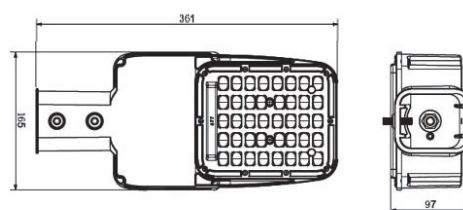


CODE	DSAL40MN68S40T1
POWER	40W
LUMEN	6800lm
BEAM ANGLE	T1 / T2 / T3 / T4
TEMPERATURE	-25°C~+50°C
CCT	4000K
CRI	Ra>70
OPTICAL	Glass transparent diffuser
VOLTAGE	100-277V / 50-60Hz
PRODUCT SIZE	L361*W165*H97mm
IP RATING	IP66
MATERIAL	Die-cast Aluminium
FINISH	Grey

Deco Street Alpha-Lite



MINI

PRODUCT DRAWING

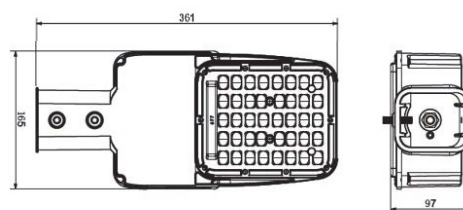

CODE	DSAL50MN85S40T1
POWER	50W
LUMEN	8500lm
BEAM ANGLE	T1 / T2 / T3 / T4
TEMPERATURE	-25°C~+50°C
CCT	4000K
CRI	Ra>70
OPTICAL	Glass transparent diffuser
VOLTAGE	100-277V / 50-60Hz
PRODUCT SIZE	L361*W165*H97mm
IP RATING	IP66
MATERIAL	Die-cast Aluminium
FINISH	Grey


Deco Street Alpha-Lite



MINI

CODE	DSAL60MN102S40T1
POWER	60W
LUMEN	10200lm
BEAM ANGLE	T1 / T2 / T3 / T4
TEMPERATURE	-25°C~+50°C
CCT	4000K
CRI	Ra>70
OPTICAL	Glass transparent diffuser
VOLTAGE	100-277V / 50-60Hz
PRODUCT SIZE	L361*W165*H97mm
IP RATING	IP66
MATERIAL	Die-cast Aluminium
FINISH	Grey

PRODUCT DRAWING

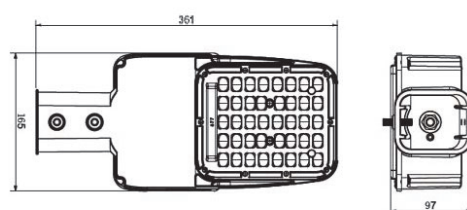


Deco Street Alpha-Lite



MINI PLUS

CODE	DSAL80MP136S40T1
POWER	80W
LUMEN	13600lm
BEAM ANGLE	T1 / T2 / T3 / T4
TEMPERATURE	-25°C~+50°C
CCT	4000K
CRI	Ra>70
OPTICAL	Glass transparent diffuser
VOLTAGE	100-277V / 50-60Hz
PRODUCT SIZE	L361*W185*H97mm
IP RATING	IP66
MATERIAL	Die-cast Aluminium
FINISH	Grey

PRODUCT DRAWING

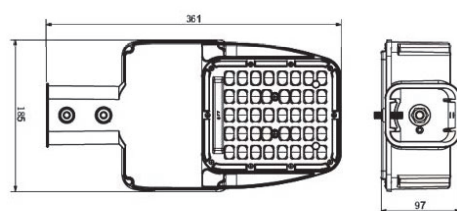


Deco Street Alpha-Lite



MIDI

CODE	DSAL90MD153S40T1
POWER	90W
LUMEN	15300lm
BEAM ANGLE	T1 / T2 / T3 / T4
TEMPERATURE	-25°C~+50°C
CCT	4000K
CRI	Ra>70
OPTICAL	Glass transparent diffuser
VOLTAGE	100-277V / 50-60Hz
PRODUCT SIZE	L429*W214*H99mm
IP RATING	IP66
MATERIAL	Die-cast Aluminium
FINISH	Grey

PRODUCT DRAWING

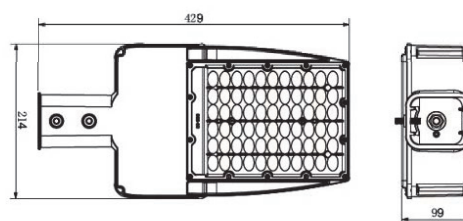


Deco Street Alpha-Lite



MIDI

CODE	DSAL120MD204S40T1
POWER	120W
LUMEN	20400lm
BEAM ANGLE	T1 / T2 / T3 / T4
TEMPERATURE	-25°C~+50°C
CCT	4000K
CRI	Ra>70
OPTICAL	Glass transparent diffuser
VOLTAGE	100-277V / 50-60Hz
PRODUCT SIZE	L429*W214*H99mm
IP RATING	IP66
MATERIAL	Die-cast Aluminium
FINISH	Grey

PRODUCT DRAWING

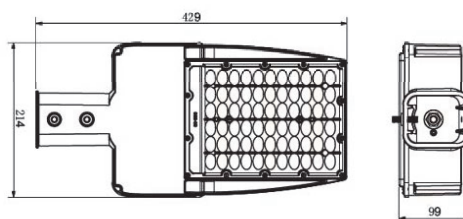


Deco Street Alpha-Lite



MAXI

PRODUCT DRAWING

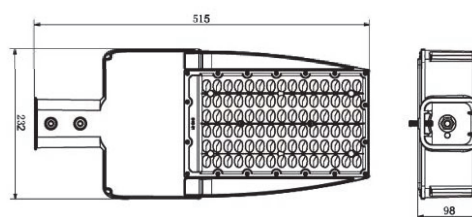


CODE	DSAL150MA255S40T1
POWER	150W
LUMEN	25500lm
BEAM ANGLE	T1 / T2 / T3 / T4
TEMPERATURE	-25°C~+50°C
CCT	4000K
CRI	Ra>70
OPTICAL	Glass transparent diffuser
VOLTAGE	100-277V / 50-60Hz
PRODUCT SIZE	L515*W232*H98mm
IP RATING	IP66
MATERIAL	Die-cast Aluminium
FINISH	Grey

Deco Street Alpha-Lite



MAXI

PRODUCT DRAWING

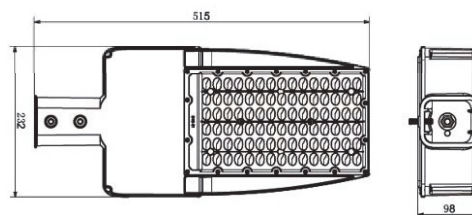

CODE	DSAL180MA306S40T1
POWER	180W
LUMEN	30600lm
BEAM ANGLE	T1 / T2 / T3 / T4
TEMPERATURE	-25°C~+50°C
CCT	4000K
CRI	Ra>70
OPTICAL	Glass transparent diffuser
VOLTAGE	100-277V / 50-60Hz
PRODUCT SIZE	L515*W232*H98mm
IP RATING	IP66
MATERIAL	Die-cast Aluminium
FINISH	Grey


Deco Street Alpha-Lite



MAXI

CODE	DSAL200MA340S40T1
POWER	200W
LUMEN	34000lm
BEAM ANGLE	T1 / T2 / T3 / T4
TEMPERATURE	-25°C~+50°C
CCT	4000K
CRI	Ra>70
OPTICAL	Glass transparent diffuser
VOLTAGE	100-277V / 50-60Hz
PRODUCT SIZE	L515*W232*H98mm
IP RATING	IP66
MATERIAL	Die-cast Aluminium
FINISH	Grey

PRODUCT DRAWING

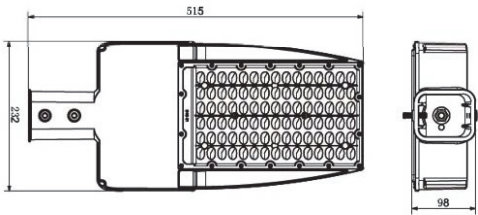


Deco Solar Essence Series



CODE	DSSE20SL42S40
POWER	20W
LUMEN	4200lm
BEAM ANGLE	Wide Asymmetric
TEMPERATURE	-10°C~+50°C
CCT	4000K
CRI	Ra>70
OPTICAL	Transparent diffuser
VOLTAGE	Solar Panel: 18V / Batt:12.8V/15AH
PRODUCT SIZE	L600*W400*H325mm
IP RATING	IP66
MATERIAL	Steel Plate Housing + Extruded Aluminium Frame + PC
FINISH	Black RAL9004

PRODUCT DRAWING

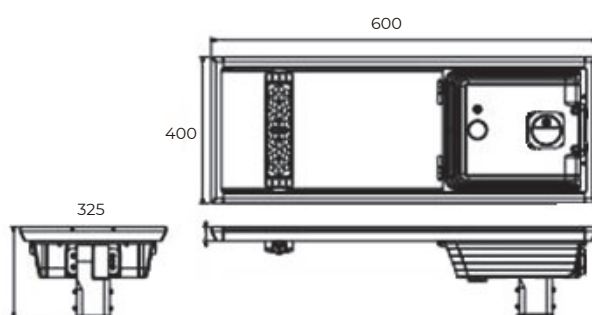


Deco Solar Essence Series



CODE	DSSE30SL63S40
POWER	30W
LUMEN	6300lm
BEAM ANGLE	Wide Asymmetric
TEMPERATURE	-10°C~+50°C
CCT	4000K
CRI	Ra>70
OPTICAL	Transparent diffuser
VOLTAGE	Solar Panel: 18V / Batt:12.8V/15AH
PRODUCT SIZE	L600*W400*H325mm
IP RATING	IP66
MATERIAL	Steel Plate Housing + Extruded Aluminium Frame + PC
FINISH	Black RAL9004

PRODUCT DRAWING

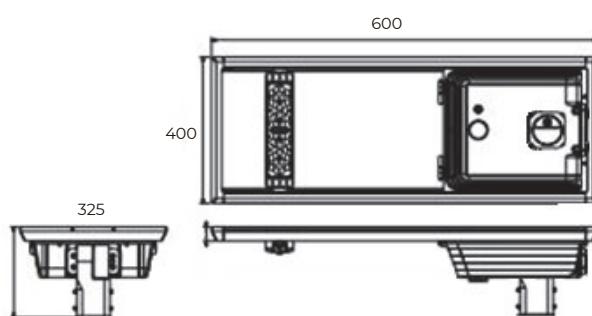


Deco Solar Essence Series



CODE	DSSE40SL84S40
POWER	40W
LUMEN	8400lm
BEAM ANGLE	Wide Asymmetric
TEMPERATURE	-10°C~+50°C
CCT	4000K
CRI	Ra>70
OPTICAL	Transparent diffuser
VOLTAGE	Solar Panel: 18V / Batt:12.8V/15AH
PRODUCT SIZE	L786*W400*H325mm
IP RATING	IP66
MATERIAL	Steel Plate Housing + Extruded Aluminium Frame + PC
FINISH	Black RAL9004

PRODUCT DRAWING

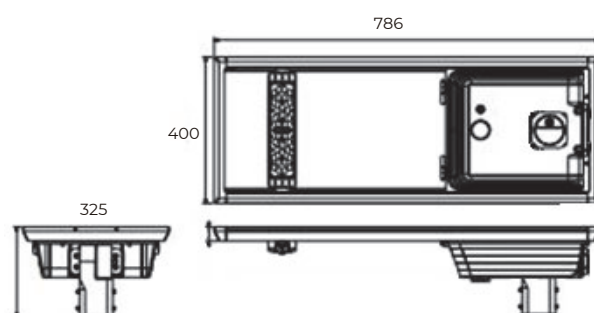


Deco Solar Essence Series



CODE	DSSE50SL105S40
POWER	50W
LUMEN	10500lm
BEAM ANGLE	Wide Asymmetric
TEMPERATURE	-10°C~+50°C
CCT	4000K
CRI	Ra>70
OPTICAL	Transparent diffuser
VOLTAGE	Solar Panel: 18V / Batt:12.8V/15AH
PRODUCT SIZE	L786*W400*H325mm
IP RATING	IP66
MATERIAL	Steel Plate Housing + Extruded Aluminium Frame + PC
FINISH	Black RAL9004

PRODUCT DRAWING

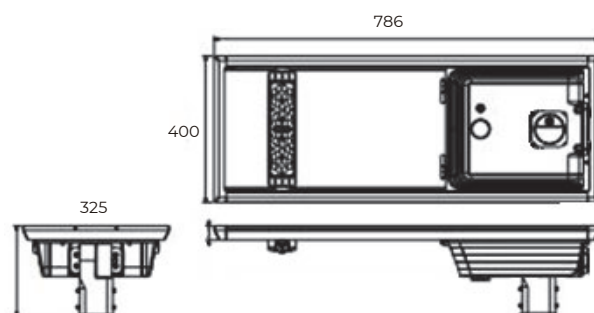


Deco Solar Essence Series



CODE	DSSE60SL126S40
POWER	60W
LUMEN	12600lm
BEAM ANGLE	Wide Asymmetric
TEMPERATURE	-10°C~+50°C
CCT	4000K
CRI	Ra>70
OPTICAL	Transparent diffuser
VOLTAGE	Solar Panel: 18V / Batt:12.8V/15AH
PRODUCT SIZE	L1065*W400*H355mm
IP RATING	IP66
MATERIAL	Steel Plate Housing + Extruded Aluminium Frame + PC
FINISH	Black RAL9004

PRODUCT DRAWING

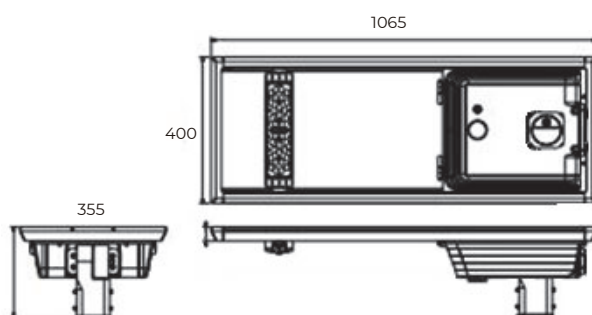


Deco Solar Essence Series



CODE	DSSE80SL168S40
POWER	80W
LUMEN	16800lm
BEAM ANGLE	Wide Asymmetric
TEMPERATURE	-10°C~+50°C
CCT	4000K
CRI	Ra>70
OPTICAL	Transparent diffuser
VOLTAGE	Solar Panel: 18V / Batt:12.8V/15AH
PRODUCT SIZE	L880*W586*H355mm
IP RATING	IP66
MATERIAL	Steel Plate Housing + Extruded Aluminium Frame + PC
FINISH	Black RAL9004

PRODUCT DRAWING

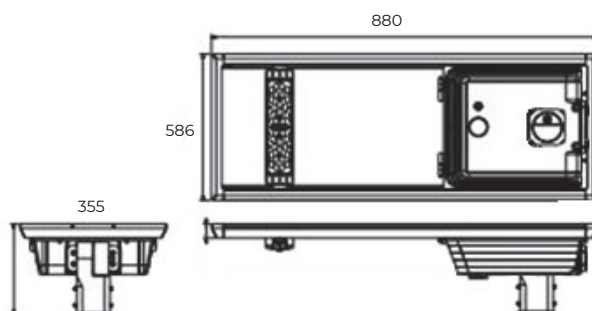


Deco Solar Essence Series



CODE	DSSE100SL210S40
POWER	100W
LUMEN	21000lm
BEAM ANGLE	Wide Asymmetric
TEMPERATURE	-10°C~+50°C
CCT	4000K
CRI	Ra>70
OPTICAL	Transparent diffuser
VOLTAGE	Solar Panel: 18V / Batt:12.8V/15AH
PRODUCT SIZE	L1080*W586*H355mm
IP RATING	IP66
MATERIAL	Steel Plate Housing + Extruded Aluminium Frame + PC
FINISH	Black RAL9004

PRODUCT DRAWING

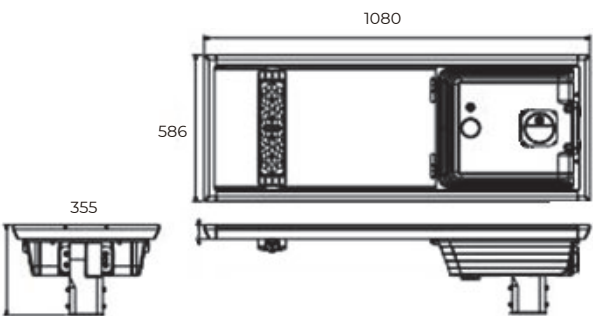


Deco Bellator Climate



CODE	DSCL6EXP20G28S50
POWER	20W
LUMEN	4200lm
BEAM ANGLE	120°
TEMPERATURE	-40°C~+60°C
CCT	5000K
CRI	Ra>80
OPTICAL	Robust, impact-resistant PC optics
VOLTAGE	100-277V 50/60Hz
PRODUCT SIZE	L695*W218*H132mm
IP RATING	IP66
MATERIAL	Stainless steel body, robust construction, explosion resistant
FINISH	Grey

PRODUCT DRAWING

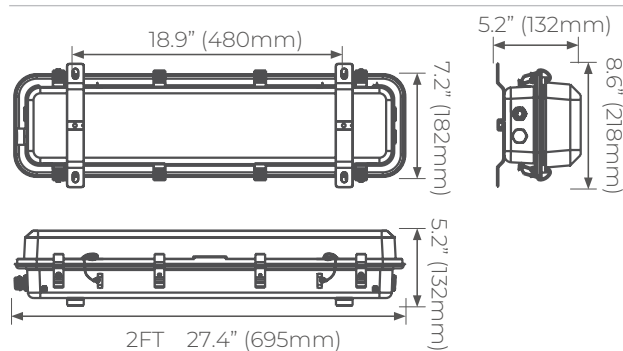


Deco Bellator Climate



CODE	DSCL6EXP30G42S50
POWER	30W
LUMEN	4200lm
BEAM ANGLE	120°
TEMPERATURE	-40°C~+60°C
CCT	5000K
CRI	Ra>80
OPTICAL	Robust, impact-resistant PC optics
VOLTAGE	100-277V 50/60Hz
PRODUCT SIZE	L695*W218*H132mm
IP RATING	IP66
MATERIAL	Stainless steel body, robust construction, explosion resistant
FINISH	Grey

PRODUCT DRAWING

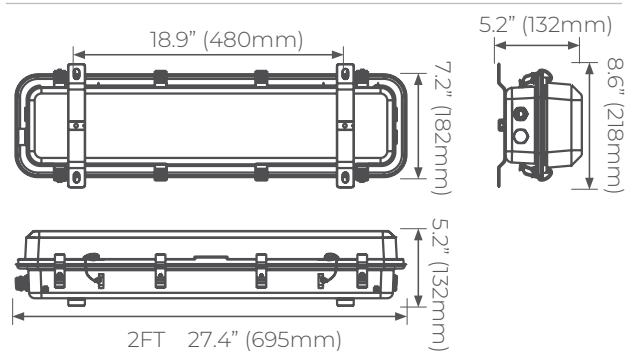


Deco Bellator Climate

EXPLOSION PROOF



CODE	DSCL12EXP40G56S50
POWER	40W
LUMEN	5600lm
BEAM ANGLE	120°
TEMPERATURE	-40°C~+60°C
CCT	5000K
CRI	Ra>80
OPTICAL	Robust, impact-resistant PC optics
VOLTAGE	100-277V 50/60Hz
PRODUCT SIZE	L1318*W219H205mm
IP RATING	IP66
MATERIAL	Stainless steel body, robust construction, explosion resistant
FINISH	Grey

PRODUCT DRAWING

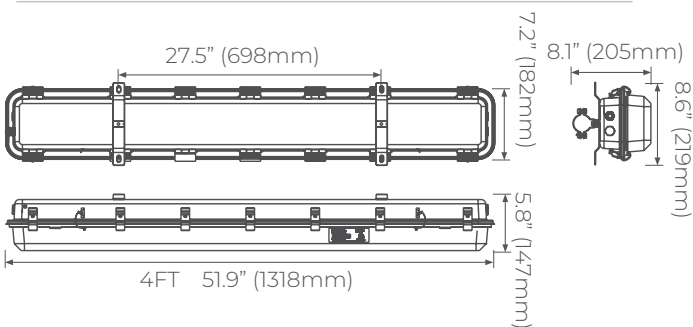


Deco Bellator Climate



CODE	DSCL12EXP50G70S50
POWER	50W
LUMEN	7000lm
BEAM ANGLE	120°
TEMPERATURE	-40°C~+60°C
CCT	5000K
CRI	Ra>80
OPTICAL	Robust, impact-resistant PC optics
VOLTAGE	100-277V 50/60Hz
PRODUCT SIZE	L1318*W219H205mm
IP RATING	IP66
MATERIAL	Stainless steel body, robust construction, explosion resistant
FINISH	Grey

PRODUCT DRAWING

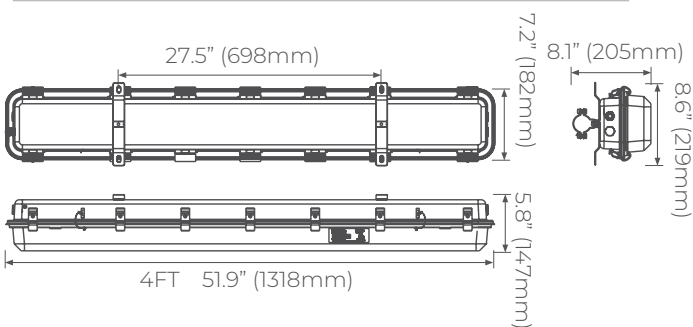


Deco Bellator Climate

EXPLOSION PROOF



CODE	DSCL12EXP60G84S50
POWER	60W
LUMEN	8400lm
BEAM ANGLE	120°
TEMPERATURE	-40°C~+60°C
CCT	5000K
CRI	Ra>80
OPTICAL	Robust, impact-resistant PC optics
VOLTAGE	100-277V 50/60Hz
PRODUCT SIZE	L1318*W219*H205mm
IP RATING	IP66
MATERIAL	Stainless steel body, robust construction, explosion resistant
FINISH	Grey

PRODUCT DRAWING

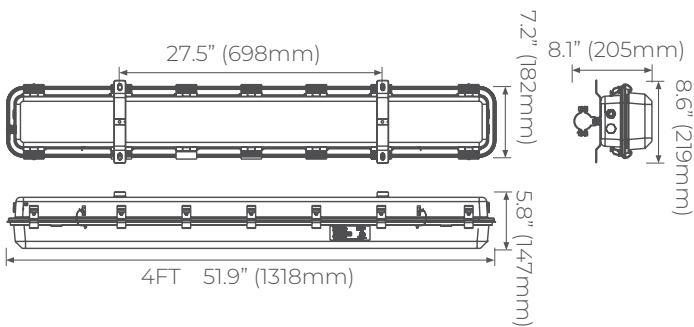


Deco Bellator Linear



CODE	DSBL6EPX20G28S50
POWER	20W
LUMEN	2800lm
BEAM ANGLE	90°
TEMPERATURE	-40°C~+60°C
CCT	5000K
CRI	Ra>80
OPTICAL	PC Construction Lens
VOLTAGE	120-277V 50/60Hz
PRODUCT SIZE	L784.8*W177*H99mm
IP RATING	IP66
MATERIAL	Diecast Aluminium
FINISH	Silver

PRODUCT DRAWING

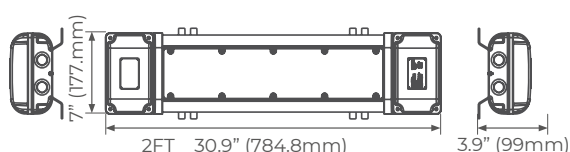


Deco Bellator Linear



CODE	DSBL6EPX40G56S50
POWER	40W
LUMEN	5600lm
BEAM ANGLE	90°
TEMPERATURE	-40°C~+60°C
CCT	5000K
CRI	Ra>80
OPTICAL	PC Construction Lens
VOLTAGE	120-277V 50/60Hz
PRODUCT SIZE	L784.8*W177*H99mm
IP RATING	IP66
MATERIAL	Diecast Aluminium
FINISH	Silver

PRODUCT DRAWING

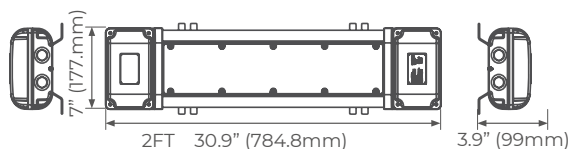


Deco Bellator Linear

CODE	DSBLI2EPX50G70S50
POWER	50W
LUMEN	7000lm
BEAM ANGLE	90°
TEMPERATURE	-40°C~+60°C
CCT	5000K
CRI	Ra>80
OPTICAL	PC Construction Lens
VOLTAGE	120-277V 50/60Hz
PRODUCT SIZE	L1303*W177.8*H122mm
IP RATING	IP66
MATERIAL	Diecast Aluminium
FINISH	Silver



PRODUCT DRAWING




Deco Bellator Linear

CODE	DSBLI2EPX80G11S50
POWER	80W
LUMEN	11200lm
BEAM ANGLE	90°
TEMPERATURE	-40°C~+60°C
CCT	5000K
CRI	Ra>80
OPTICAL	PC Construction Lens
VOLTAGE	120-277V 50/60Hz
PRODUCT SIZE	L1303*W177.8*H122mm
IP RATING	IP66
MATERIAL	Diecast Aluminium
FINISH	Silver



PRODUCT DRAWING




Deco Bellator Linear

EXPLOSION PROOF



CODE	DSBL15EPX50G70S50
POWER	50W
LUMEN	7000lm
BEAM ANGLE	90°
TEMPERATURE	-40°C~+60°C
CCT	5000K
CRI	Ra>80
OPTICAL	PC Construction Lens
VOLTAGE	120-277V 50/60Hz
PRODUCT SIZE	5FT
IP RATING	IP66
MATERIAL	Diecast Aluminium
FINISH	Silver

PRODUCT DRAWING




Deco Bellator Linear



CODE	DSBL15EPX80GE11S50
POWER	80W
LUMEN	11200lm
BEAM ANGLE	90°
TEMPERATURE	-40°C~+60°C
CCT	5000K
CRI	Ra>80
OPTICAL	PC Construction Lens
VOLTAGE	120-277V 50/60Hz
PRODUCT SIZE	5FT
IP RATING	IP66
MATERIAL	Diecast Aluminium
FINISH	Silver


PRODUCT DRAWING



Deco Bellator Highbay



PRODUCT DRAWING

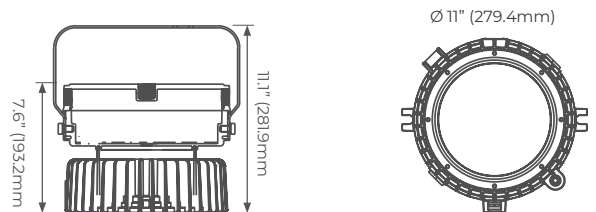


CODE	DSHBCEXP20G28S50
POWER	20W
LUMEN	2800lm
BEAM ANGLE	120°
TEMPERATURE	-40°C~+55°C
CCT	5000K
CRI	Ra>80
OPTICAL	Heat-tempered glass cover
VOLTAGE	100-277V 50/60Hz
PRODUCT SIZE	Dia279.4*H281.9mm
IP RATING	IP66
MATERIAL	Diecast Aluminium
FINISH	Silver

Deco Bellator Highbay



PRODUCT DRAWING

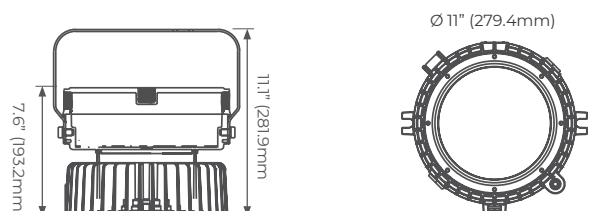

CODE	DSHBCEXP40G56S50
POWER	40W
LUMEN	5600lm
BEAM ANGLE	120°
TEMPERATURE	-40°C~+55°C
CCT	5000K
CRI	Ra>80
OPTICAL	Heat-tempered glass cover
VOLTAGE	100-277V 50/60Hz
PRODUCT SIZE	Dia279.4*H281.9mm
IP RATING	IP66
MATERIAL	Diecast Aluminium
FINISH	Silver


Deco Bellator Highbay

EXPLOSION PROOF



CODE	DSHBCEXP60G84S50
POWER	60W
LUMEN	8400lm
BEAM ANGLE	120°
TEMPERATURE	-40°C~+55°C
CCT	5000K
CRI	Ra>80
OPTICAL	Heat-tempered glass cover
VOLTAGE	100-277V 50/60Hz
PRODUCT SIZE	Dia279.4*H281.9mm
IP RATING	IP66
MATERIAL	Diecast Aluminium
FINISH	Silver

PRODUCT DRAWING

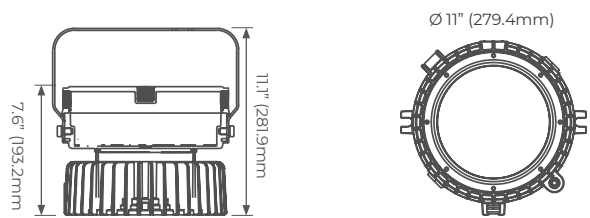


Deco Bellator Highbay



CODE	DSHBCEXP80G112S50
POWER	80W
LUMEN	11200lm
BEAM ANGLE	120°
TEMPERATURE	-40°C~+55°C
CCT	5000K
CRI	Ra>80
OPTICAL	Heat-tempered glass cover
VOLTAGE	100-277V 50/60Hz
PRODUCT SIZE	Dia279.4*H281.9mm
IP RATING	IP66
MATERIAL	Diecast Aluminium
FINISH	Silver

PRODUCT DRAWING

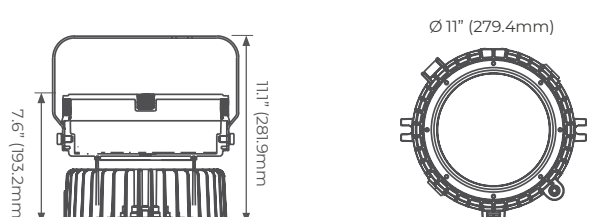


Deco Bellator Highbay



CODE	DSHBCEXP100G140S50
POWER	100W
LUMEN	14000lm
BEAM ANGLE	120°
TEMPERATURE	-40°C~+55°C
CCT	5000K
CRI	Ra>80
OPTICAL	Heat-tempered glass cover
VOLTAGE	100-277V 50/60Hz
PRODUCT SIZE	Dia:355.6*H334.5mm
IP RATING	IP66
MATERIAL	Diecast Aluminium
FINISH	Silver

PRODUCT DRAWING

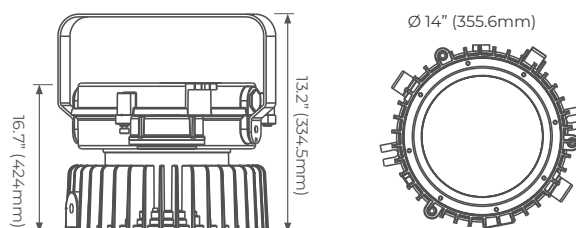


Deco Bellator Highbay



CODE	DSHBCEXP120G168S50
POWER	120W
LUMEN	16800lm
BEAM ANGLE	120°
TEMPERATURE	-40°C~+55°C
CCT	5000K
CRI	Ra>80
OPTICAL	Heat-tempered glass cover
VOLTAGE	100-277V 50/60Hz
PRODUCT SIZE	Dia:355.6*H334.5mm
IP RATING	IP66
MATERIAL	Diecast Aluminium
FINISH	Silver

PRODUCT DRAWING

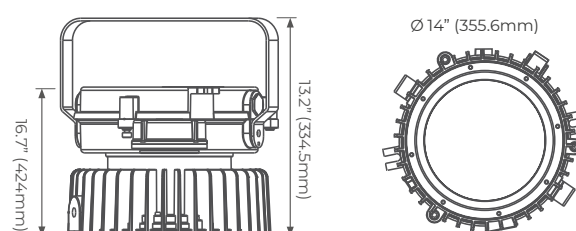


Deco Bellator Highbay

EXPLOSION PROOF



CODE	DSHBCEXP150G210S50
POWER	150W
LUMEN	21000lm
BEAM ANGLE	120°
TEMPERATURE	-40°C~+55°C
CCT	5000K
CRI	Ra>80
OPTICAL	Heat-tempered glass cover
VOLTAGE	100-277V 50/60Hz
PRODUCT SIZE	Dia:355.6*H334.5mm
IP RATING	IP66
MATERIAL	Diecast Aluminium
FINISH	Silver

PRODUCT DRAWING

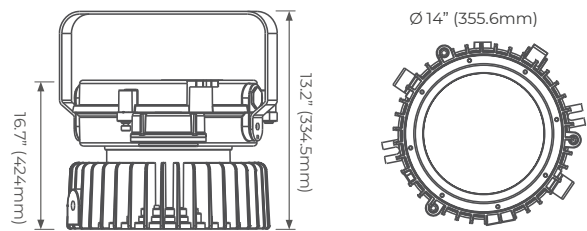


Deco Bellator Highbay PRO



CODE	DSHBEXP20G28S50
POWER	20W
LUMEN	2800lm
BEAM ANGLE	120°
TEMPERATURE	-40°C~+55°C
CCT	5000K
CRI	Ra>80
OPTICAL	Heat-tempered glass cover
VOLTAGE	100-277V 50/60Hz
PRODUCT SIZE	Dia230*H170mm
IP RATING	IP66
MATERIAL	Diecast Aluminium
FINISH	Silver

PRODUCT DRAWING

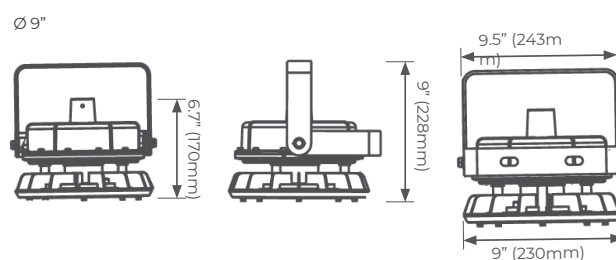


Deco Bellator Highbay PRO




CODE	DSHBEXP40G56S50
POWER	40W
LUMEN	5600lm
BEAM ANGLE	120°
TEMPERATURE	-40°C~+55°C
CCT	5000K
CRI	Ra>80
OPTICAL	Heat-tempered glass cover
VOLTAGE	100-277V 50/60Hz
PRODUCT SIZE	Dia230*H170mm
IP RATING	IP66
MATERIAL	Diecast Aluminium
FINISH	Silver

PRODUCT DRAWING

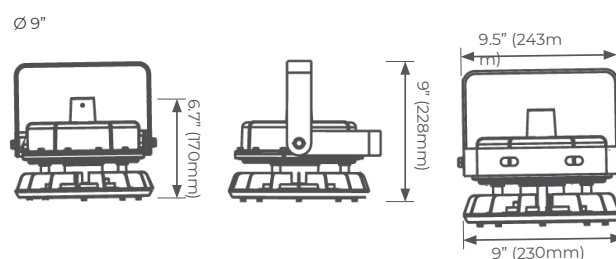


Deco Bellator Highbay

EXPLOSION PROOF




CODE	DSHBPEXP60G84S50
POWER	60W
LUMEN	8400lm
BEAM ANGLE	120°
TEMPERATURE	-40°C~+55°C
CCT	5000K
CRI	Ra>80
OPTICAL	Heat-tempered glass cover
VOLTAGE	100-277V 50/60Hz
PRODUCT SIZE	Dia268*H128mm
IP RATING	IP66
MATERIAL	Diecast Aluminium
FINISH	Silver

PRODUCT DRAWING

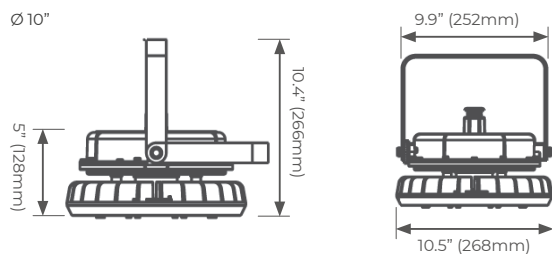


Deco Bellator Highbay




CODE	DSHBPEXP80G112S50
POWER	80W
LUMEN	11200lm
BEAM ANGLE	120°
TEMPERATURE	-40°C~+55°C
CCT	5000K
CRI	Ra>80
OPTICAL	Heat-tempered glass cover
VOLTAGE	100-277V 50/60Hz
PRODUCT SIZE	Dia268*H128mm
IP RATING	IP66
MATERIAL	Diecast Aluminium
FINISH	Silver

PRODUCT DRAWING

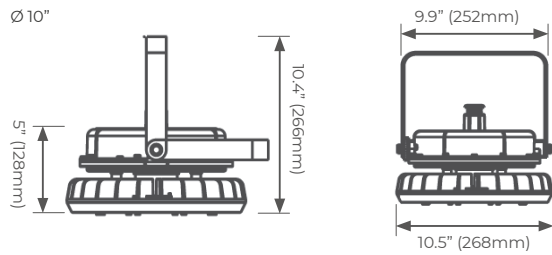


Deco Bellator Highbay PRO




CODE	DSHBEXP100G140S50
POWER	100W
LUMEN	14000lm
BEAM ANGLE	120°
TEMPERATURE	-40°C~+55°C
CCT	5000K
CRI	Ra>80
OPTICAL	Heat-tempered glass cover
VOLTAGE	100-277V 50/60Hz
PRODUCT SIZE	Dia:268*H197mm
IP RATING	IP66
MATERIAL	Diecast Aluminium
FINISH	Silver

PRODUCT DRAWING

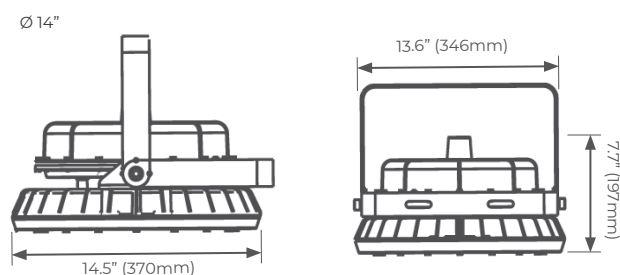


Deco Bellator Highbay PRO




CODE	DSHBEXP120G168S50
POWER	120W
LUMEN	16800lm
BEAM ANGLE	120°
TEMPERATURE	-40°C~+55°C
CCT	5000K
CRI	Ra>80
OPTICAL	Heat-tempered glass cover
VOLTAGE	100-277V 50/60Hz
PRODUCT SIZE	Dia:370*H197mm
IP RATING	IP66
MATERIAL	Diecast Aluminium
FINISH	Silver

PRODUCT DRAWING

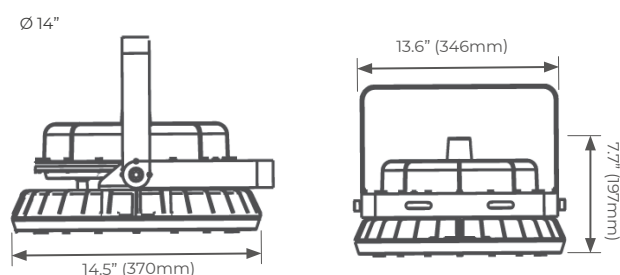


Deco Bellator Highbay PRO




CODE	DSHBPEXP150G210S50
POWER	150W
LUMEN	21000lm
BEAM ANGLE	120°
TEMPERATURE	-40°C~+55°C
CCT	5000K
CRI	Ra>80
OPTICAL	Heat-tempered glass cover
VOLTAGE	100-277V 50/60Hz
PRODUCT SIZE	Dia370*H197mm
IP RATING	IP66
MATERIAL	Diecast Aluminium
FINISH	Silver

PRODUCT DRAWING

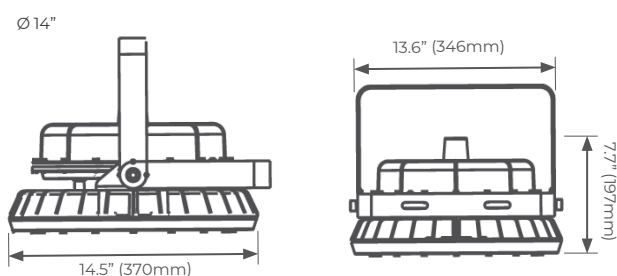


Deco Bellator Highbay PRO



CODE	DSHBPEXP200G280S50
POWER	200W
LUMEN	28000lm
BEAM ANGLE	120°
TEMPERATURE	-40°C~+55°C
CCT	5000K
CRI	Ra>80
OPTICAL	Heat-tempered glass cover
VOLTAGE	100-277V 50/60Hz
PRODUCT SIZE	Dia370*H197mm
IP RATING	IP66
MATERIAL	Diecast Aluminium
FINISH	Silver

PRODUCT DRAWING

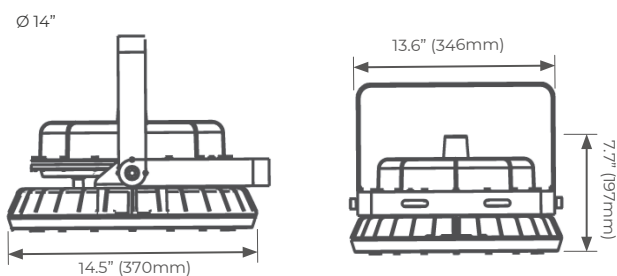


Deco Bellator Highbay PRO



CODE	DSHBPEXP250G350S50
POWER	250W
LUMEN	35000lm
BEAM ANGLE	120°
TEMPERATURE	-40°C~+55°C
CCT	5000K
CRI	Ra>80
OPTICAL	Heat-tempered glass cover
VOLTAGE	100-277V 50/60Hz
PRODUCT SIZE	Dia:400*H210mm
IP RATING	IP66
MATERIAL	Diecast Aluminium
FINISH	Silver

PRODUCT DRAWING

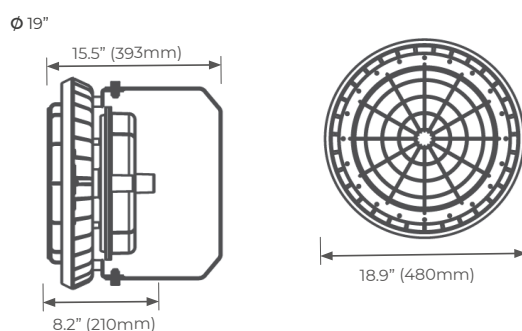


Deco Bellator Highbay PRO



CODE	DSHBPEXP300G420S50
POWER	300W
LUMEN	42000lm
BEAM ANGLE	120°
TEMPERATURE	-40°C~+55°C
CCT	5000K
CRI	Ra>80
OPTICAL	Heat-tempered glass cover
VOLTAGE	100-277V 50/60Hz
PRODUCT SIZE	Dia:400*H210mm
IP RATING	IP66
MATERIAL	Diecast Aluminium
FINISH	Silver

PRODUCT DRAWING

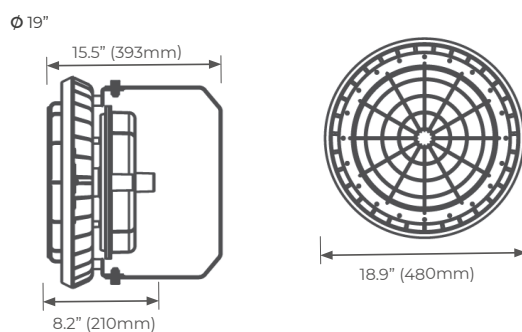


Deco Bellator Highbay PRO

EXPLOSION PROOF



CODE	DSHBPEXP400G560S50
POWER	400W
LUMEN	56000lm
BEAM ANGLE	120°
TEMPERATURE	-40°C~+55°C
CCT	5000K
CRI	Ra>80
OPTICAL	Heat-tempered glass cover
VOLTAGE	100-277V 50/60Hz
PRODUCT SIZE	Dia:400*H210mm
IP RATING	IP66
MATERIAL	Diecast Aluminium
FINISH	Silver

PRODUCT DRAWING

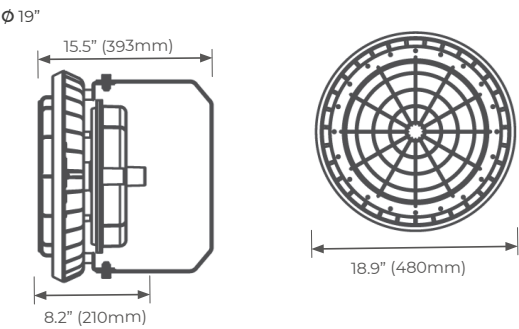


Deco Bellator Floodlight



CODE	DSBFLDEXP20G28S50
POWER	20W
LUMEN	2800lm
BEAM ANGLE	90°
TEMPERATURE	-40°C~+55°C
CCT	5000K
CRI	Ra>80
OPTICAL	Heat-tempered glass cover
VOLTAGE	100-277V 50/60Hz
PRODUCT SIZE	L250*W160*H166mm
IP RATING	IP66
MATERIAL	Diecast Aluminium
FINISH	Grey

PRODUCT DRAWING

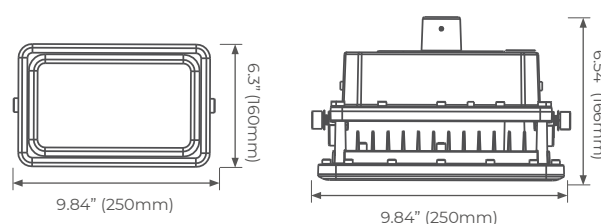


Deco Bellator Floodlight



CODE	DSBFLDEXP40G56S50
POWER	40W
LUMEN	5600lm
BEAM ANGLE	90°
TEMPERATURE	-40°C~+55°C
CCT	5000K
CRI	Ra>80
OPTICAL	Heat-tempered glass cover
VOLTAGE	100-277V 50/60Hz
PRODUCT SIZE	L250*W160*H166mm
IP RATING	IP66
MATERIAL	Diecast Aluminium
FINISH	Grey

PRODUCT DRAWING

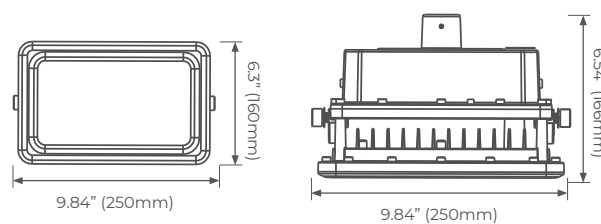

Deco Bellator Floodlight


EXPLOSION PROOF



CODE	DSBFLDEXP60G84S50
POWER	60W
LUMEN	8400lm
BEAM ANGLE	90°
TEMPERATURE	-40°C~+55°C
CCT	5000K
CRI	Ra>80
OPTICAL	Heat-tempered glass cover
VOLTAGE	100-277V 50/60Hz
PRODUCT SIZE	L250*W160*H166mm
IP RATING	IP66
MATERIAL	Diecast Aluminium
FINISH	Grey

Note: For voltage 200-480V 50/60Hz used this code **DSBFLDEXP60GH84S50**

PRODUCT DRAWING

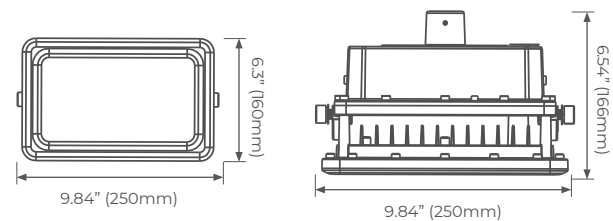


Deco Bellator Floodlight



CODE	DSBFLDEXP80G112S50
POWER	80W
LUMEN	11200lm
BEAM ANGLE	90°
TEMPERATURE	-40°C~+55°C
CCT	5000K
CRI	Ra>80
OPTICAL	Heat-tempered glass cover
VOLTAGE	100-277V 50/60Hz
PRODUCT SIZE	L320*W240*H261mm
IP RATING	IP66
MATERIAL	Diecast Aluminium
FINISH	Grey

Note: For voltage 200-480V 50/60Hz used this code **DSBFLDEXP80GH112S50**

PRODUCT DRAWING

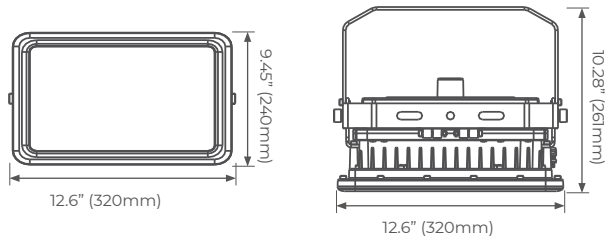


Deco Bellator Floodlight



CODE	DSBFLDEXP100G140S50
POWER	100W
LUMEN	14000lm
BEAM ANGLE	90°
TEMPERATURE	-40°C~+55°C
CCT	5000K
CRI	Ra>80
OPTICAL	Heat-tempered glass cover
VOLTAGE	100-277V 50/60Hz
PRODUCT SIZE	L320*W240*H261mm
IP RATING	IP66
MATERIAL	Diecast Aluminium
FINISH	Grey

Note: For voltage 200-480V 50/60Hz used this code **DSBFLDEXP100GH140S50**

PRODUCT DRAWING

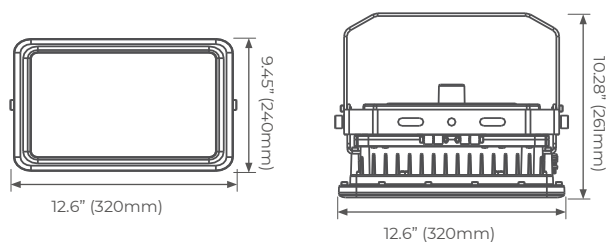


Deco Bellator Floodlight



CODE	DSBFLDEXP120G168S50
POWER	120W
LUMEN	16800lm
BEAM ANGLE	90°
TEMPERATURE	-40°C~+55°C
CCT	5000K
CRI	Ra>80
OPTICAL	Heat-tempered glass cover
VOLTAGE	100-277V 50/60Hz
PRODUCT SIZE	L320*W240*H261mm
IP RATING	IP66
MATERIAL	Diecast Aluminium
FINISH	Grey

Note: For voltage 200-480V 50/60Hz used this code **DSBFLDEXP120GH168S50**

PRODUCT DRAWING

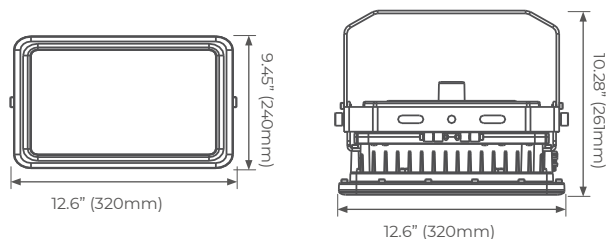

Deco Bellator Floodlight


EXPLOSION PROOF



CODE	DSBFLDEXPI150G210S50
POWER	150W
LUMEN	21000lm
BEAM ANGLE	90°
TEMPERATURE	-40°C~+55°C
CCT	5000K
CRI	Ra>80
OPTICAL	Heat-tempered glass cover
VOLTAGE	100-277V 50/60Hz
PRODUCT SIZE	L380*W230*H188mm
IP RATING	IP66
MATERIAL	Diecast Aluminium
FINISH	Grey

Note: For voltage 200-480V 50/60Hz used this code **DSBFLDEXPI150GH210S50**

PRODUCT DRAWING

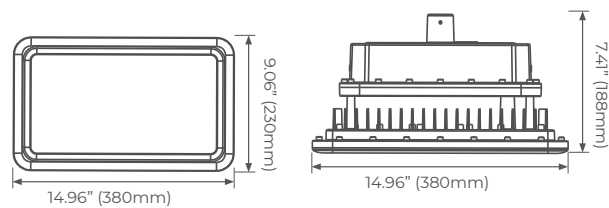


Deco Bellator Floodlight



CODE	DSBFLDEXP200G280S50
POWER	200W
LUMEN	28000lm
BEAM ANGLE	90°
TEMPERATURE	-40°C~+55°C
CCT	5000K
CRI	Ra>80
OPTICAL	Heat-tempered glass cover
VOLTAGE	100-277V 50/60Hz
PRODUCT SIZE	L380*W230*H188mm
IP RATING	IP66
MATERIAL	Diecast Aluminium
FINISH	Grey

Note: For voltage 200-480V 50/60Hz used this code **DSBFLDEXP200GH280S50**

PRODUCT DRAWING

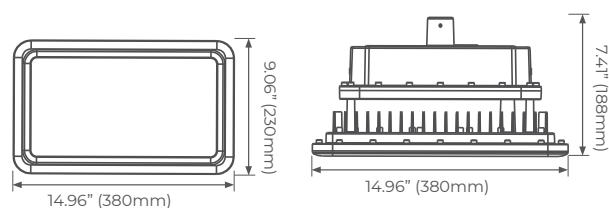


Deco Bellator Floodlight



CODE	DSBFLDEXP250G350S50
POWER	250W
LUMEN	35000lm
BEAM ANGLE	90°
TEMPERATURE	-40°C~+55°C
CCT	5000K
CRI	Ra>80
OPTICAL	Heat-tempered glass cover
VOLTAGE	100-277V 50/60Hz
PRODUCT SIZE	L473*W350*H210mm
IP RATING	IP66
MATERIAL	Diecast Aluminium
FINISH	Grey

Note: For voltage 200-480V 50/60Hz used this code **DSBFLDEXP250GH350S50**

PRODUCT DRAWING

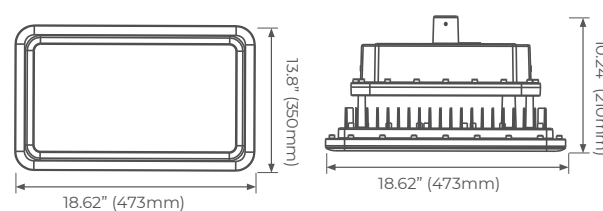


Deco Bellator Floodlight



CODE	DSBFLDEXP300G420S50
POWER	300W
LUMEN	42000lm
BEAM ANGLE	90°
TEMPERATURE	-40°C~+55°C
CCT	5000K
CRI	Ra>80
OPTICAL	Heat-tempered glass cover
VOLTAGE	100-277V 50/60Hz
PRODUCT SIZE	L473*W350*H210mm
IP RATING	IP66
MATERIAL	Diecast Aluminium
FINISH	Grey

Note: For voltage 200-480V 50/60Hz used this code **DSBFLDEXP300GH420S50**

PRODUCT DRAWING

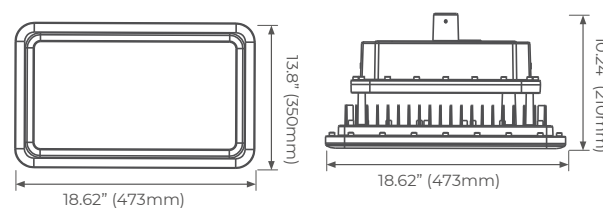

Deco Bellator Floodlight


EXPLOSION PROOF



CODE	DSBFLDEXP400G560S50
POWER	400W
LUMEN	56000lm
BEAM ANGLE	90°
TEMPERATURE	-40°C~+55°C
CCT	5000K
CRI	Ra>80
OPTICAL	Heat-tempered glass cover
VOLTAGE	100-277V 50/60Hz
PRODUCT SIZE	L473*W350*H210mm
IP RATING	IP66
MATERIAL	Diecast Aluminium
FINISH	Grey

Note: For voltage 200-480V 50/60Hz used this code **DSBFLDEXP400GH560S50**

PRODUCT DRAWING

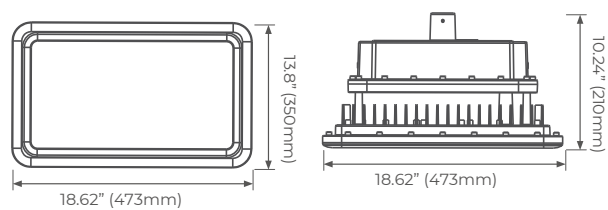


Deco Bellator Bulkhead



CODE	DSGEXP10G14S50
POWER	10W
LUMEN	1400lm
BEAM ANGLE	90°
TEMPERATURE	-20°C~+60°C
CCT	5000K
CRI	Ra>80
OPTICAL	Heat-tempered glass lens
VOLTAGE	100-277V 50/60Hz
PRODUCT SIZE	L228*H322mm
IP RATING	IP66
MATERIAL	Diecast Aluminium
FINISH	Grey

PRODUCT DRAWING

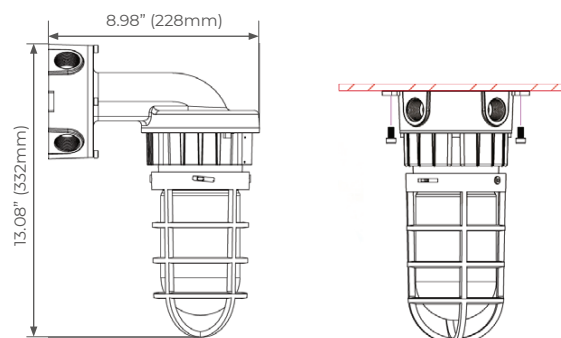


Deco Bellator Bulkhead



CODE	DSGEXP20G28S50
POWER	20W
LUMEN	2800lm
BEAM ANGLE	90°
TEMPERATURE	-20°C~+60°C
CCT	5000K
CRI	Ra>80
OPTICAL	Heat-tempered glass lens
VOLTAGE	100-277V 50/60Hz
PRODUCT SIZE	L228*H322mm
IP RATING	IP66
MATERIAL	Diecast Aluminium
FINISH	Grey

PRODUCT DRAWING

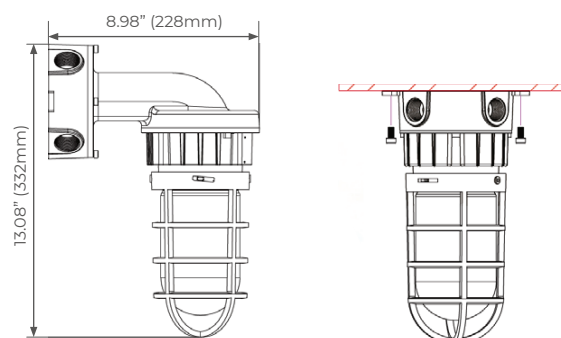


Deco Bellator Bulkhead

EXPLOSION PROOF



CODE	DSGEXP30G42S50
POWER	30W
LUMEN	4200lm
BEAM ANGLE	90°
TEMPERATURE	-20°C~+60°C
CCT	5000K
CRI	Ra>80
OPTICAL	Heat-tempered glass lens
VOLTAGE	100-277V 50/60Hz
PRODUCT SIZE	L228*H322mm
IP RATING	IP66
MATERIAL	Diecast Aluminium
FINISH	Grey

PRODUCT DRAWING

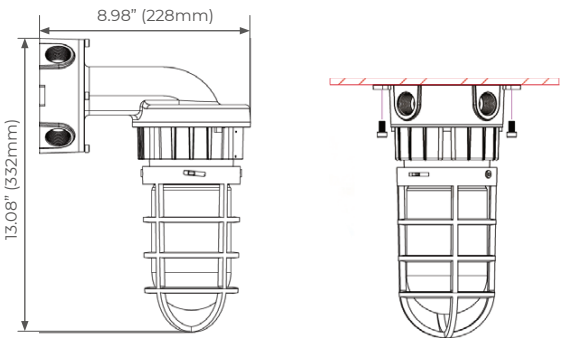


Deco Bellator Bulkhead



CODE	DSGEXP40G56S50
POWER	40W
LUMEN	5600lm
BEAM ANGLE	90°
TEMPERATURE	-20°C~+60°C
CCT	5000K
CRI	Ra>80
OPTICAL	Heat-tempered glass lens
VOLTAGE	100-277V 50/60Hz
PRODUCT SIZE	L228*H322mm
IP RATING	IP66
MATERIAL	Diecast Aluminium
FINISH	Grey

PRODUCT DRAWING

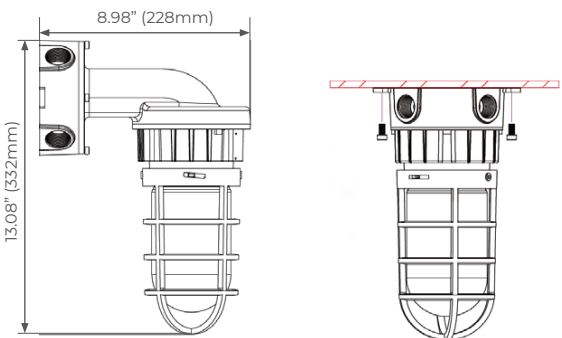





UK:**HEAD OFFICE:**

Email: info@luceco.com

Luceco plc, Caparo House
103 Baker Street, London
England, W1U 6LN

DISTRIBUTION CENTRE:

Tel: +44 (0) 1952 238 100
Email: uk_sales@luceco.com

Luceco plc
Luceco Distribution Centre
Stafford Park 1, Telford
Shropshire, England, TF3 3BD

IRELAND:

Email: sales@luceco.ie

FRANCE:

Email: fr_sales@luceco.com

ITALY:

Email: it_sales@luceco.com

SPAIN:

Tel: +34 93 829 55 75
Email: es_sales@luceco.com

Luceco Southern Europe S.L.
C/ Bobinadora 1-5
08302 Mataró
Barcelona, Spain

MIDDLE EAST & AFRICA:

Tel: +971 4 609 1867
Email: mea_sales@luceco.com

Luceco Middle East FZCO
Bldg. 5EB, Office 342
PO Box 371128, DAFZA
Dubai, UAE

ASIA PACIFIC:**JIAXING:**

Tel: +86 (0) 573 8357 0200
Email: asia_sales@luceco.com

No 1438, Jiachuang Road
Xiuzhou Industrial Park, Jiaxing
Zhejiang, China, P.C. 314031

HONG KONG:

Email: hk_sales@luceco.com

UNITED STATES:

Email: us_sales@luceco.com

MEXICO & LATIN AMERICA:

Tel: +52 (81) 5000 9437
Email: ventas@luceco.com

Luceco México
AV Lázaro Cárdenas #318 int 201
Col Real San Agustín
San Pedro Garza García
N.L. Mexico CP 66278

TECHNICAL SUPPORT:

Tel: 01952 238 128
Email: technical@luceco.com

Lines open Monday to Friday
8.30am to 5pm, with answer phone
service outside these hours.

